

## Epson LQ-350

**Brand :** Epson

**Product code:** C11CC25001


**Product name :** LQ-350

LQ-350, 24 pins, 53 dB, 22 W, 200 V - 240 V AC, 4.1 kg

Epson LQ-350. Maximum print speed: 347 cps, Maximum resolution: 360 x 180 DPI, Maximum print speed (draft): 260 cps. Paper tray media types: Envelopes, Labels, Roll. Product colour: Black, Grey, Buffer size: 128 KB, Sound pressure level (printing): 53 dB. Standard interfaces: Parallel, Serial, USB 2.0. Print head: 24-pin, Print direction: Bidirectional, Print head life: 400 million characters



<b>Printing</b>		<b>Operational conditions</b>	
Maximum resolution *	360 x 180 DPI	Operating relative humidity (H-H)	10 - 80%
Maximum printing width (columns) *	80	<b>System requirements</b>	
Colour *	✗	Windows operating systems supported	Windows 2000, Windows 7, Windows 8, Windows Vista, Windows XP
Maximum print speed *	347 cps	Bundled software	Epson Status Monitor
Maximum print speed (draft)	260 cps	<b>Weight &amp; dimensions</b>	
Maximum print speed (LQ)	86 cps	Width	348 mm
Character pitch	10 cpi	Depth	275 mm
Maximum number of copies	4 copies	Height	154 mm
<b>Paper handling</b>		Weight	4.1 kg
Paper tray media types	Envelopes, Labels, Roll	<b>Packaging data</b>	
<b>Features</b>		Quantity per pack	1 pc(s)
Product colour *	Black, Grey	Package width	220 mm
Buffer size *	128 KB	Package depth	425 mm
Sound pressure level (printing) *	53 dB	Package height	360 mm
Page description languages *	Epson ESC/P2	Package weight	5.11 g
Country of origin	Indonesia	<b>Other features</b>	
<b>Ports &amp; interfaces</b>		Connectivity technology	Wired
Standard interfaces *	Parallel, Serial, USB 2.0	Print technology	Dot matrix
<b>Endurance</b>		<b>Logistics data</b>	
Print head *	24-pin	Products per pallet	45 pc(s)
Print direction	Bidirectional	Pallet gross length	120 cm
Print head life	400 million characters	Pallet gross width	80 cm
Ribbon life (black, draft)	3 million characters	Pallet gross height	2.13 m
Ribbon life (black, LQ)	2.5 million characters	Products per pallet layer	5 pc(s)
Mean time between failures (MTBF)	10000 h	Products per pallet layer (UK)	6 pc(s)
<b>Power</b>		Products per pallet (UK)	54 pc(s)
Power consumption (typical)	22 W	Pallet length (UK)	120 cm
AC input voltage	200 - 240 V	Pallet width (UK)	100 cm
<b>Operational conditions</b>		Pallet height (UK)	2.13 m
Operating temperature (T-T)	5 - 35 °C	Harmonized System (HS) code	84433210

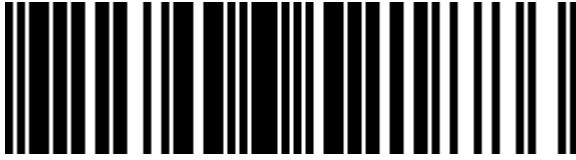

8715946521886

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.