

Epson LQ-690

Brand : Epson

Product code: C11CA13041

Product name : LQ-690




Epson LQ 690 55 dB(A), 497mmx387mmx230mm, 9.4 kg, Parallel port

[Epson LQ-690:](#)

This reliable countertop printer has a flatbed format which is really useful if you need to change paper types regularly.


Epson LQ-690. Maximum print speed: 529 cps, Maximum resolution: 360 x 180 DPI, Maximum print speed (draft): 396 cps. Paper tray media types: Envelopes, Labels, Roll, Continuous paper thickness range: 0.065 - 0.49 mm. Product colour: Grey, Buffer size: 128 KB, Sound pressure level (printing): 57 dB. Standard interfaces: Parallel, USB 2.0. Print head: 24-pin, Print direction: Bidirectional, Print head life: 400 million characters



Printing		Operational conditions	
Maximum resolution *	360 x 180 DPI	Operating temperature (T-T)	5 - 35 °C
Maximum printing width (columns) *	106	Operating relative humidity (H-H)	10 - 80%
Colour *	✗	System requirements	
Maximum print speed *	529 cps	Windows operating systems supported	Windows 2000, Windows 7, Windows 8, Windows 98, Windows XP
Maximum print speed (draft)	396 cps	Bundled software	Epson Status Monitor
Maximum print speed (LQ)	132 cps	Weight & dimensions	
Character pitch	10,12 cpi	Width	480 mm
Maximum number of copies	7 copies	Depth	370 mm
Bitmap fonts	Courier, Draft, OCR-B, Orator, Orator-S, Prestige, Roman, Sans Serif, Script, Script C	Height	210 mm
Scalable fonts	Roman, Roman T, Sans Serif, Sans Serif H	Weight	6.8 kg
Paper handling		Packaging data	
Paper tray media types	Envelopes, Labels, Roll	Quantity per pack	1 pc(s)
Continuous paper thickness range	0.065 - 0.49 mm	Package width	290 mm
Features		Package depth	550 mm
Product colour *	Grey	Package height	380 mm
Buffer size *	128 KB	Package weight	8.49 g
Sound pressure level (printing) *	57 dB	Other features	
Page description languages *	Epson ESC/P2, PPDS	Connectivity technology	Wired
Noise level (idle)	54 dB	Print technology	Dot matrix
Country of origin	Indonesia	Needles	24
Ports & interfaces		Logistics data	
Standard interfaces *	Parallel, USB 2.0	Products per pallet	28 pc(s)
Endurance		Pallet gross length	120 cm
Print head *	24-pin	Pallet gross width	80 cm
Print direction	Bidirectional	Pallet gross height	2.18 m
Print head life	400 million characters	Products per pallet layer	4 pc(s)
Ribbon life (black, draft)	10 million characters	Products per pallet layer (UK)	5 pc(s)
Mean time between failures (MTBF)	20000 h	Products per pallet (UK)	35 pc(s)
Power		Pallet length (UK)	120 cm
Power consumption (typical)	37.5 W	Pallet width (UK)	100 cm
Power consumption (standby)	3 W	Pallet height (UK)	2.18 m

Logistics data

Harmonized System (HS) code 84433210

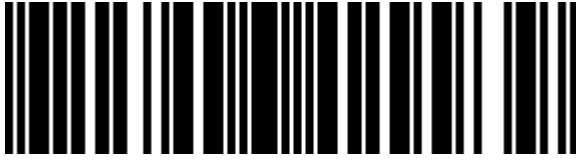

8715946429939

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 28-DEC-2024. Prints or copies of Information are only valid on the printed Publication date