



## APC Smart-UPS RT 2200VA UPS-virtalähde 2,2 kVA 1540 W 10 AC-pistorasia(a)

**Tuotemerkki :** APC


**Tuotekoodi:** SURTD2200XLIM

**Tuotteen nimi :** Smart-UPS RT 2200VA

APC Smart-UPS RT 2200VA. Kokonaislähtöteho (VA): 2,2 kVA, Lähtöteho: 1540 W, Tulon käyttöjännite (min.): 100 V. Pistorasian tyypit: C13 liitin, C19 liitin, Ulostulojen määrä: 10 AC-pistorasia(a).  
Akkuteknologia: Sealed Lead Acid (VRLA), Akun latausaika: 2,5 h. Kotelo: Telineasennettava, Tuotteen väri: musta, Telineen kapasiteetti: 3U. Vaatimustenmukaisuustodistukset: RoHS, Sertifiointi: CE, DNV, EN 50091-1, EN 50091-2, EN 55022 Cl. A, EN 60950, EN 61000-3-2.



Features		Design	
Output power capacity *	2.2 kVA	Rack capacity	3U
Output power *	1540 W	Cable length	2.5 m
Input operation voltage (min) *	100 V	Product colour *	Black
Input operation voltage (max) *	280 V		
Input frequency *	50/60 Hz		
Output operation voltage (min)	220 V		
Output operation voltage (max)	240 V		
Surge energy rating	480 J		
Efficiency	92%		
Crest factor	3:1		
Emergency Power Off (EPO)	✓		
Output voltage Total Harmonic Distortion (THD)	3%		
Noise level	55 dB		
Audible alarm(s)	✓		
Ports & interfaces		Operational conditions	
AC outlet types	C13 coupler, C19 coupler	Operating temperature (T-T)	0 - 55 °C
AC outlets quantity	10 AC outlet(s)	Storage temperature (T-T)	-15 - 45 °C
Number of output IEC jumpers	2	Operating relative humidity (H-H)	0 - 95%
Ethernet LAN (RJ-45) ports	1	Storage relative humidity (H-H)	0 - 95%
		Operating altitude	0 - 3000 m
		Non-operating altitude	0 - 15000 m
Battery		Certificates	
Battery technology	Sealed Lead Acid (VRLA)	Compliance certificates	RoHS
Battery recharge time	2.5 h	Certification	CE, DNV, EN 50091-1, EN 50091-2, EN 55022 Cl. A, EN 60950, EN 61000-3-2.
Design		Weight & dimensions	
Form factor *	Rackmount	Width	130 mm
		Depth	660 mm
		Height	432 mm
		Weight	54.5 kg
		Packaging data	
		Package weight	63.6 kg
		Logistics data	
		Harmonized System (HS) code	85078000
		Other features	
		Dimensions (WxDxH)	130 x 660 x 432 mm
		Nominal output voltage	230 V
		Nominal input voltage	230 V
		Package dimensions (WxDxH)	603 x 980 x 347 mm

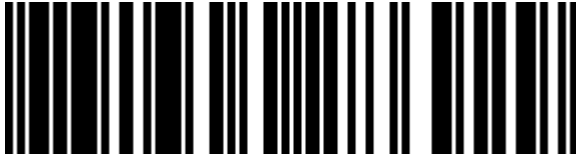

0731304286929



731304286929

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.