APC Smart-UPS SMT1500RMI2UC - 4x C13, USB, Rackmount 2U, SmartConnect, 1500VA
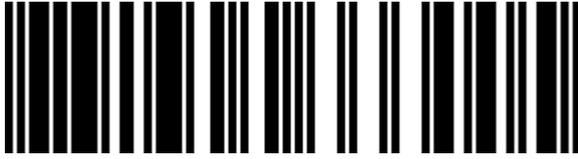
Brand : APC

Product name : APC Smart-UPS SMT1500RMI2UC - 4x C13, USB, Rackmount 2U, SmartConnect, 1500VA

Product code: SMT1500RMI2UC

APC Smart-UPS SMT1500RMI2UC - 4x C13, USB, Rack Mountable, 2U, SmartConnect, 1500VA
APC Smart-UPS SMT1500RMI2UC - 4x C13, USB, Rackmount 2U, SmartConnect, 1500VA. UPS topology: Line-Interactive, Output power capacity: 1.5 kVA, Output power: 1000 W. AC outlet types: C13 coupler, IEC Jumpers, Power plug: C14 coupler, AC outlets quantity: 4 AC outlet(s). Battery technology: Sealed Lead Acid (VRLA), Battery life (max): 6 year(s), Battery recharge time: 3 h. Form factor: Rackmount, Product colour: Black, Rack capacity: 2U. Certification: CE, EAC, EN / IEC 62040-1, EN / IEC 62040-2, Energy Star 1.0 (EU), RCM, TÜV, VDE

Features

UPS topology *	Line-Interactive
Output power capacity *	1.5 kVA
Output power *	1000 W
Waveform *	Sine
Input operation voltage (min) *	151 V
Input operation voltage (max) *	302 V
Input frequency *	50/60 Hz
Output operation voltage (min)	220 V
Output operation voltage (max)	240 V
Output frequency	50/60 Hz
Surge energy rating	459 J
Response time	10 ms
Noise level	46 dB
Audible alarm(s)	✔
Audible alarm modes	Alarm when on battery, Low battery alarm
Auto-restart	✔

Ports & interfaces

AC outlet types	C13 coupler, IEC Jumpers
Power plug	C14 coupler
AC outlets quantity	4 AC outlet(s)
USB port	✔
Serial interface	✔
Serial interface type	RJ-45
SmartSlot	✔

Battery

Battery technology	Sealed Lead Acid (VRLA)
Number of batteries supported	1
Battery life (max)	6 year(s)
Battery recharge time	3 h
Hot-swap battery	✔
Automatic battery test	✔
Cold start	✔

Design

Form factor *	Rackmount

Design

Rack capacity	2U
Product colour *	Black
Display type	LCD
LED indicators	✔

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-15 - 45 °C
Operating relative humidity (H-H)	0 - 95%
Storage relative humidity (H-H)	0 - 95%
Operating altitude	0 - 3000 m
Non-operating altitude	0 - 15000 m

Certificates

Certification	CE, EAC, EN / IEC 62040-1, EN / IEC 62040-2, Energy Star 1.0 (EU), RCM, TÜV, VDE

Packaging content

Rack mount kit	✔
Cables included	RS-232, USB cable
Manual	✔

Sustainability

Sustainability certificates	ENERGY STAR, Green Premium

Weight & dimensions

Width	432 mm
Depth	477 mm
Height	86 mm
Weight	26.1 kg

Packaging data

Resource CD	✔
Package width	594 mm
Package depth	603 mm
Package height	251 mm
Package weight	31.9 kg

Logistics data

Products per pallet	8 pc(s)
Harmonized System (HS) code	85078000
Total carbon footprint (kg of CO2e)	1416.6

Other features

Output voltage	230 V

0731304333005

731304333005