

## D-Link DIS-700G-28XS verkkokytkin Hallittu L2+ 1U musta

**Tuotemerkki :** D-Link


**Tuotekoodi:** DIS-700G-28XS

**Tuotteen nimi :** DIS-700G-28XS

D-Link DIS-700G-28XS. Kytkin tyyppi: Hallittu, Kytinkerros: L2+. USB 2.0 -porttien määrä: 1, Console-portti: RJ-45. MAC-osoitetaulukko: 8000 entries. Verkkostandardit: IEEE 802.1D, IEEE 802.1Q, IEEE 802.1ad, IEEE 802.1v, IEEE 802.1w, IEEE 802.3x. Virtaliitin: DC-tulo jakkiliitin. Telineasennus, Kotelo: 1U



Management features		Weight & dimensions	
Switch type *	Managed	Width	440 mm
Switch layer	L2+	Depth	318.5 mm
Quality of Service (QoS) support	✓	Height	44 mm
Traffic shaping	✓	Weight	4.5 kg
Ports & interfaces		Packaging data	
SFP module slots quantity	24	Package width	430 mm
SFP+ module slots quantity	4	Package depth	570 mm
Console port	RJ-45	Package height	110 mm
USB 2.0 ports quantity	1	Package weight	5.83 kg
Power connector	DC-in jack	Technical details	
Network		Shipping (inner) case height	46.8 cm
Networking standards *	IEEE 802.1D, IEEE 802.1Q, IEEE 802.1ad, IEEE 802.1v, IEEE 802.1w, IEEE 802.3x	Shipping (inner) case width	35.7 cm
10G support *	✓	Shipping (inner) case length	58.2 cm
VLAN support	✓	Shipping (inner) case net weight	17.5 kg
Virtual LAN features	Multicast VLAN	Products per shipping (inner) case	3 pc(s)
Data transmission		Pallet gross weight (air)	242.1 kg
MAC address table *	8000 entries	Master (outer) cases per pallet (air)	12 pc(s)
Multicast features		Products per pallet (air)	36 pc(s)
Multicast support	✓	Pallet gross length	120 cm
Design		Pallet gross width	110 cm
Rack mounting *	✓	Pallet height (air)	107.1 mm
Form factor	1U	Pallet gross weight (sea)	467.2 kg
Product colour	Black	Master (outer) cases per pallet (sea)	24 pc(s)
Power		Products per pallet (sea)	72 pc(s)
AC input voltage	100 - 240 V	Pallet height (sea)	2.01 m
AC input frequency	50 - 60 Hz	Shipping (inner) case gross weight	18.8 kg
Power consumption (typical)	35 W	Logistics data	
Operational conditions		Harmonized System (HS) code	85176990
Operating temperature (T-T)	-10 - 65 °C		
Operating relative humidity (H-H)	5 - 95%		

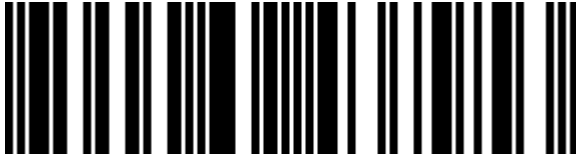

0790069437953



790069437953

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.