



APC Smart-UPS UPS-virtalähde Linjainteraktiivinen 1,5 kVA 1200 W 8 AC-pistorasia(a)

Tuotemerkki : APC

Tuotekoodi: SMX1500RMI2U

Tuotteen nimi : Smart-UPS




APC Smart-UPS. UPS topologia: Linjainteraktiivinen, Kokonaislähtöteho (VA): 1,5 kVA, Lähtöteho: 1200 W. Pistorasian tyypit: C13 liitin, Virtapistoke: C14 liitin, Ulostulojen määrä: 8 AC-pistorasia(a). Akkuteknologia: Sealed Lead Acid (VRLA), Akun kapasiteetti: 311 VAH, Tyypillinen varmuuskopioaika täydellä kuormituksella: 5,8 min. Kotelo: Telineasennettava/Torni, Tuotteen väri: musta, Telineen kapasiteetti: 2U. Vaatimustenmukaisuustodistukset: RoHS, Sertifiointi: CE, EN/IEC 62040-1, EN/IEC 62040-2, RCM, VDE, REACH, PEP, EOL



Features		Design	
UPS topology *	Line-Interactive	Rack capacity	2U
Output power capacity *	1.5 kVA	Cable length	1.83 m
Output power *	1200 W	Product colour *	Black
Waveform *	Sine	LED indicators	✓
Input operation voltage (min) *	151 V	Operational conditions	
Input operation voltage (max) *	302 V	Operating temperature (T-T)	0 - 40 °C
Input frequency *	50/60 Hz	Storage temperature (T-T)	-15 - 45 °C
Output frequency regulation	50/60 Hz	Operating relative humidity (H-H)	0 - 95%
Automatic Voltage Regulation (AVR)	✓	Storage relative humidity (H-H)	0 - 95%
Surge energy rating	645 J	Operating altitude	0 - 3000 m
Efficiency	98.5%	Non-operating altitude	0 - 15000 m
Emergency Power Off (EPO)	✓	Certificates	
Noise level	40 dB	Compliance certificates	RoHS
Audible alarm(s)	✓	Certification	CE, EN/IEC 62040-1, EN/IEC 62040-2, RCM, VDE, REACH, PEP, EOL
Audible alarm modes	Low battery alarm, Overload alarm	Packaging content	
Auto-restart	✓	Rack mount kit	✓
Ports & interfaces		Cables included	RS-232, USB cable
AC outlet types	C13 coupler	Quick installation guide	✓
Power plug	C14 coupler	Weight & dimensions	
AC outlets quantity	8 AC outlet(s)	Width	432 mm
Number of output IEC jumpers	2	Depth	490 mm
USB port	✓	Height	89 mm
SmartSlot	✓	Weight	24.8 kg
Battery		Packaging data	
Battery technology	Sealed Lead Acid (VRLA)		
Battery capacity	311 VAh		
Typical backup time at full load	5.8 min		

Battery		Packaging data	
Typical backup time at half load	17.2 min	Software CD	✓
Battery life (max)	5 year(s)	Package width	589 mm
Battery recharge time	3 h	Package depth	620 mm
Hot-swap battery	✓	Package height	246 mm
Automatic battery test	✓	Package weight	30 kg
Cold start	✓	Logistics data	
Design		Products per pallet	8 pc(s)
Form factor *	Rackmount/Tower	Harmonized System (HS) code	85078000
		Total carbon footprint (kg of CO2e)	1419.64
		Other features	
		Nominal output voltage	230 V
		Nominal input voltage	230 V
		Packaging content	Removable support feet

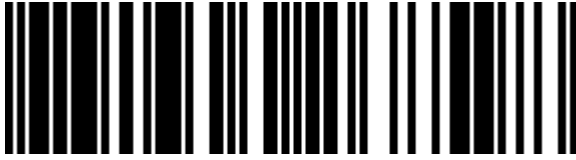

0731304268598



731304268598

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 15-APR-2025. Prints or copies of Information are only valid on the printed Publication date