



## APC SUM3000RMXL12U uninterruptible power supply (UPS) 3 kVA 2850 W



**Brand :** APC

**Product code:** SUM3000RMXL12U

**Product name :** SUM3000RMXL12U

APC Smart-UPS XL Modular 3000VA 230V Rackmount/Tower

[APC SUM3000RMXL12U uninterruptible power supply \(UPS\) 3 kVA 2850 W:](#)


APC Smart-UPS XL, 3000VA/2850W, Input 230V/Output 230V, Interface Port DB-9 RS-232, RJ-45 10/100 Base-T, USB, Extended runtime model, Rack Height 2 U

Includes: CD with software, Rack Mounting Brackets, Rack Mounting support rails, Smart UPS signalling RS-232 cable, USB cable, User Manual

Features:

Adjustable voltage-transfer points, Audible Alarms, Automatic internal bypass, Automatic self-test, Boost and Trim Automatic Voltage Regulation (AVR), Cold-start capable, Disconnected battery notification, Hot-swappable batteries, LED status indicators, Modular design, Network manageable, Rack/Tower Convertible, Safety-agency approved, Scalable runtime, Serial Connectivity, SmartSlot, Temperature-compensated battery charging, USB Connectivity, User-replaceable batteries, User-replaceable power modules.

Features		Operational conditions	
Output power capacity *	3 kVA	Storage relative humidity (H-H)	0 - 95%
Output power *	2850 W	Operating altitude	0 - 3000 m
Surge energy rating	490 J	Weight & dimensions	
Emergency Power Off (EPO)	✓	Weight	47 kg
Battery		Packaging data	
Typical backup time at full load	3.5 min	Bundled software	CD with software
Typical backup time at half load	11.9 min	Logistics data	
Replacement battery cartridge	RBC43	Harmonized System (HS) code	85078000
Design		Other features	
Cable length	3 m	I/O ports	Pre-Installed SmartSlot Card - AP9617
Product colour *	Black	Battery type	VRLA
Operational conditions		Interface	DB-9 RS-232, RJ-45 10/100 Base-T, USB
Operating temperature (T-T)	0 - 40 °C	Output connections	(7) IEC 320 C13 (1) IEC 320 C19 (4) IEC Jumpers
Storage temperature (T-T)	-20 - 45 °C	Input connection type	IEC-320 C20
Operating relative humidity (H-H)	0 - 95%	Dimensions (WxDxH)	430 x 680 x 90 mm
		Nominal output voltage	230 V
		Filtering description	0.3% IEEE/UL 1449
		Nominal input voltage	230 V
		Networking features	✓

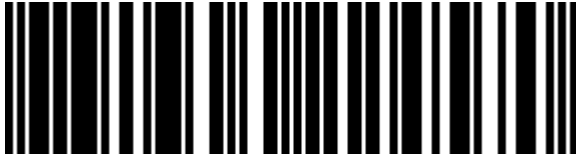

0731304224570



731304224570

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.