



APC Smart-UPS XL Modular 1500VA 230V uninterruptible power supply (UPS) 1.5 kVA 1425 W

Brand : APC

Product code: SUM1500RMXLI2U

Product name : Smart-UPS XL Modular 1500VA 230V

APC Smart-UPS XL Modular 1500VA 230V Rackmount/Tower

APC Smart-UPS XL Modular 1500VA 230V uninterruptible power supply (UPS) 1.5 kVA 1425 W:


APC Smart-UPS XL, 1500VA/1425W, Input 230V/Output 230V, Interface Port DB-9 RS-232, RJ-45 10/100 Base-T, USB, Extended runtime model, Rack Height 2 U

Includes: CD with software, Installation Guide, Rack Mounting Brackets, Rack Mounting support rails, Smart UPS signalling RS-232 cable, USB cable, User Manual, Web/SNMP Management Card

Features: Adjustable voltage-transfer points, Automatic internal bypass, Automatic self-test, Boost and Trim Automatic Voltage Regulation (AVR), Cold-start capable, Disconnected battery notification, Global safety approvals, Hot-swappable batteries, LED status indicators, Modular design, Network manageable, Rack/Tower Convertible, Safety-agency approved, Scalable runtime, Serial Connectivity, SmartSlot, Temperature-compensated battery charging, USB Connectivity, User-replaceable batteries, User-replaceable power modules.



Features		Operational conditions	
Output power capacity *	1.5 kVA	Operating relative humidity (H-H)	0 - 95%
Output power *	1425 W	Storage relative humidity (H-H)	0 - 95%
Surge energy rating	490 J	Operating altitude	0 - 3000 m
Emergency Power Off (EPO)	✓	Certificates	
Audible alarm(s)	✓	Certification	C-tick,CE,EN 50091-2,EN 55022 Class A,EN 61000-3-2,GOST
Ports & interfaces		Weight & dimensions	
Number of output IEC jumpers	2	Weight	47 kg
Battery		Logistics data	
Typical backup time at full load	11.9 min	Harmonized System (HS) code	85078000
Typical backup time at half load	28.3 min	Other features	
Replacement battery cartridge	RBC43	I/O ports	AP9619
Design		Battery type	VRLA
Cable length	3 m	Interface	DB-9 RS-232, RJ-45 10/100 Base-T, USB
Product colour *	Black	Output connections	(9) IEC 320 C13
Operational conditions		Input connection type	IEC-320 C14
Operating temperature (T-T)	0 - 40 °C	Dimensions (WxDxH)	600 x 980 x 250 mm
Storage temperature (T-T)	-20 - 45 °C	Nominal output voltage	230 V
		Output voltage note	220: 230 / 240
		Nominal input voltage	230 V
		Networking features	✓

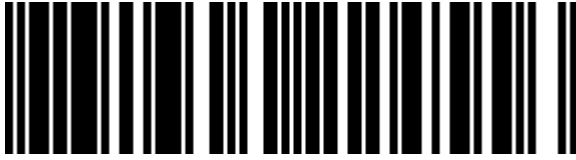

0731304224556



731304224556

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.