



## APC Symmetra RM 6kVA exp to 6kVA N+1 UPS-virtalähde 4200 W

**Tuotemerkki :** APC

**Tuotekoodi:** SYH6K6RMI

**Tuotteen nimi :** Symmetra RM 6kVA exp to 6kVA N+1



APC Symmetra RM 6kVA exp to 6kVA N+1. Kokonaislähtöteho (VA): 6 kVA, Lähtöteho: 4200 W. Tyypillinen varmuuskopioaika täydellä kuormituksella: 12,7 min, Tyypillinen varmuuskopioaika puolikkaalla kuormituksella: 30,3 min, Vaihtoakku: APC Replacement Battery SYBT2. Tuotteen väri: musta. Niputettu ohjelmisto: - PowerChute Network Shutdown - PowerChute plus for AIX v4.2.3 - PowerChute plus for HP-UX v 4.2.3.... Akkutyypin: Maintenance-free sealed Lead-Acid battery with suspended electrolyte: leakproof, Käyttöliittymä: DB-9 RS-232, RJ-45 10 Base-T ethernet for web/ SNMP/ Telnet management, Lähtöliittimet: (8)IEC 320 C13 (2)IEC 320 C19

### Features

Output power capacity *	6 kVA
Output power *	4200 W
Emergency Power Off (EPO)	✓

### Battery

Typical backup time at full load	12.7 min
Typical backup time at half load	30.3 min
Replacement battery cartridge	APC Replacement Battery SYBT2

### Design

Product colour *	Black
------------------	-------

### Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-15 - 45 °C
Operating relative humidity (H-H)	0 - 95%

### Operational conditions

Storage relative humidity (H-H)	0 - 95%
---------------------------------	---------

### Packaging data

Bundled software	- PowerChute Network Shutdown - PowerChute plus for AIX v4.2.3 - PowerChute plus for HP-UX v 4.2.3 - PowerChute plus for Linux v 4.5.2 - PowerChute plus for Novell NetWare v4.3.3 - PowerChute plus for Red Hat Linux v 4.5.2.1 - PowerChute plus for Solaris v 4.5 - PowerChute Plus for Windows NT/2000 (English) v. 5.2.1
------------------	---

### Logistics data


Harmonized System (HS) code	85078000
-----------------------------	----------

### Other features

Battery type	Maintenance-free sealed Lead-Acid battery with suspended electrolyte: leakproof
Interface	DB-9 RS-232, RJ-45 10 Base-T ethernet for web/ SNMP/ Telnet management
Output connections	(8)IEC 320 C13 (2)IEC 320 C19
Input connection type	Hard Wire 3-wire
Dimensions (WxDxH)	482.6 x 730.3 x 355.6 mm
Nominal output voltage	230 V
Output voltage note	Configurable for 220: 230 or 240 nominal output voltage
Nominal input voltage	230 V




5907176118919

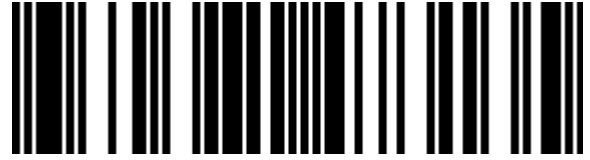

7330381473135



8592978085360

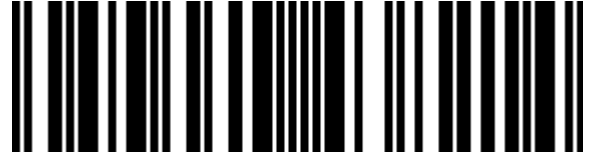

5054444438214

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.