



APC SYA12K16RMI uninterruptible power supply (UPS) 12 kVA 8400 W



Brand : APC

Product code: SYA12K16RMI

Product name : SYA12K16RMI


APC Symmetra LX 12kVA Scalable to 16kVA N+1 Rack-mount, 220/230/240V or 380/400/415V

[APC SYA12K16RMI uninterruptible power supply \(UPS\) 12 kVA 8400 W:](#)

Industry’s most space-optimized modular UPS solutions

Engineered to deliver the highest level of business continuity possible, the Symmetra LX uses a modular, redundant architecture that can scale power and run-time as demand increases or when higher levels of availability are required. Advancements in this next generation design greatly decrease foot print or U-space needed in an equipment rack, increase speed and ease of deployment and reduce repair time. With built-in network manageability and a comprehensive portfolio available from 4-16 kVA N+1, the on-line Symmetra LX is the choice to protect high-performance IT and telecom equipment in computer rooms and small data centers.

Features		Weight & dimensions	
Output power capacity *	12 kVA	Weight	242.7 kg
Output power *	8400 W	Packaging data	
Emergency Power Off (EPO)	✓	Package weight	290 kg
Audible alarm(s)	✓	Logistics data	
Battery		Products per pallet	1.00 pc(s)
Typical backup time at full load	7.5 min	Harmonized System (HS) code	85078000
Typical backup time at half load	20.2 min	Other features	
Replacement battery cartridge	SYBT5	I/O ports	(1) Hard Wire 3-wire (H N + G) (8) IEC 320 C13 (10) IEC 320 C19 Hard Wire 3 wire (1PH+N+G) Hard Wire 5-wire (3PH + N + G)
Operational conditions		Battery type	Lead-Acid
Operating temperature (T-T)	0 - 40 °C	Interface	DB-9 RS-232, Smart-Slot
Storage temperature (T-T)	-15 - 45 °C	Output connections	(1) Hard Wire 3-wire (H N + G) (8) IEC 320 C13 (10) IEC 320 C19
Operating relative humidity (H-H)	0 - 95%	Input connection type	Hard Wire 3 wire (1PH+N+G), Hard Wire 5-wire (3PH + N + G)
Storage relative humidity (H-H)	0 - 95%	Dimensions (WxDxH)	472 x 688 x 838 mm
Operating altitude	0 - 3000 m	Nominal output voltage	230 V
		Output voltage note	220: 230, 240
		Nominal input voltage	230-400 V
		Package dimensions (WxDxH)	599 x 997 x 1054 mm

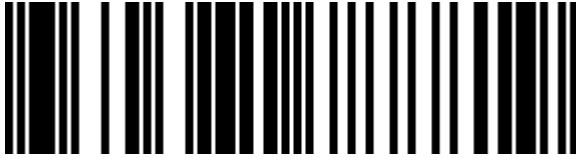

7330381788819



8592978085919



3606485318752

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.