![tp-link]

TP-Link TL-MR3020 langaton reititin Nopea Ethernet Yksi kaista (2,4 GHz) Harmaa, Valkoinen

Tuotemerkki : TP-Link   **Tuotekoodi:** TL-MR3020 V3.2
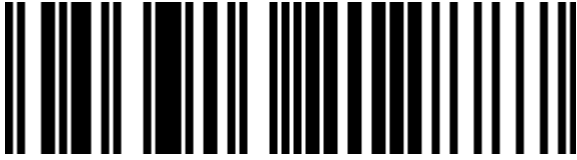
Tuotteen nimi : TL-MR3020

TP-Link TL-MR3020. Wi-Fi-taajuus: Yksi kaista (2,4 GHz), Wi-Fi-standardi: Wi-Fi 4 (802.11n), WLAN-tiedonsiirtonopeus (maks.): 150 Mbit/s. Ethernet LAN -käyttöliittymän tyyppi: Nopea Ethernet, Ethernet LAN -datanopeudet: 10,100 Mbit/s, Kaapelitekniikka: 10/100Base-T(X). Tietoturva-algoritmit: 128-bit WEP, 64-bit WEP, WPA-PSK, WPA2-PSK. Tuotetyyppi: Kannettava reititin, Tuotteen väri: Harmaa, Valkoinen. Sertifiointi: CE, FCC, RoHS

WAN connection

Ethernet WAN *	✔
DSL WAN *	✘
SIM card slot *	✘
3G/4G USB modem compatibility *	✔

Wireless LAN features

Wi-Fi band *	Single-band (2.4 GHz)
Top Wi-Fi standard *	Wi-Fi 4 (802.11n)
WLAN data transfer rate (max) *	150 Mbit/s
Wi-Fi standards	802.11b, 802.11g, Wi-Fi 4 (802.11n)

Network

Ethernet LAN *	✔
Ethernet LAN interface type *	Fast Ethernet
Ethernet LAN data rates	10,100 Mbit/s
Cabling technology	10/100Base-T(X)
Networking standards	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, IEEE 802.3, IEEE 802.3u
Port forwarding	✔

Mobile network

3G	✔
4G	✔

Ports & interfaces

Ethernet LAN (RJ-45) ports *	1
USB port *	✔
USB 2.0 ports quantity	1
USB charging port	✔
Memory card slot(s)	✘

Design

Product colour	Grey, White
LED indicators	✔
Product type *	Portable router

Certificates

Certification	CE, FCC, RoHS

Packaging content

Cables included	LAN (RJ-45), USB
AC adapter included	✔

Antenna

Antenna design *	Internal

Power

Power source type *	AC, USB
Output voltage	5 V
Output current	1 A

Operational conditions

Operating temperature (T-T)	10 - 60 °C
Storage temperature (T-T)	-40 - 80 °C
Operating relative humidity (H-H)	10 - 90%
Storage relative humidity (H-H)	5 - 90%

Ports & interfaces	
DC-in jack	✔

Management features	
Web-based management	✔
Reset button	✔

Security	
Security algorithms	128-bit WEP, 64-bit WEP, WPA-PSK, WPA2-PSK
Firewall	✔
Filtering	✔
MAC address filtering	✔
DMZ support	✔

Protocols	
DHCP client	✔
DHCP server	✔
Universal Plug and Play (UPnP)	✔

System requirements	
Windows operating systems supported	Windows 2000, Windows 2000 Professional, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 98SE, Windows NT, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows XP Home, Windows XP Home x64, Windows XP Professional
Linux operating systems supported	✔
Mac operating systems supported	✔

Weight & dimensions	
Width	74 mm
Depth	67 mm
Height	22 mm

Packaging data	
Package width	110 mm
Package depth	109 mm
Package height	81.5 mm
Package weight	210 g

Logistics data	
Harmonized System (HS) code	85176990

Other features	
Mobile network connection	✔
WLAN data transfer rates supported	150 Mbit/s
Frequency range	2.4 - 2.4835 GHz

5053313212887

6935364051709

0778890697883

778890697883

6935364082352