

# KYOCERA ECOSYS M2640idw Laser A4 1200 x 1200 DPI 40 ppm Wi-Fi

**Tuotemerkki :** KYOCERA

**Tuoteperhe:** ECOSYS

**Tuotekoodi:** 1102S53NLO

**Tuotteen nimi :** M2640idw


KYOCERA ECOSYS M2640idw. Tulostustekniikka: Laser, Tulostus: Yksittäistulostus, Suurin resoluutio: 1200 x 1200 DPI. Kopiointi: Yksittäiskopiointi, Kopioinnin enimmäistarkkuus: 600 x 600 DPI. Skannaus: Väriskanlaus, Optinen skannauserottelutarkkuus: 600 x 600 DPI. Faksaus: Yksittäisfaksin lähetys. Kaksipuolinen toiminto: Kopiointi, Faksi, Tulosta, Skannaus. Suurin ISO A-luokan paperikoko: A4. Wi-Fi. Suoratulostus. Tuotteen väri: musta, Valkoinen



Printing		Paper handling	
Duplex printing mode	Auto	Auto Document Feeder (ADF) media weight	50 - 160 g/m <sup>2</sup>
Print technology *	Laser	Duplex media weight	60 - 163 g/m <sup>2</sup>
Printing *	Mono printing	Scan media weight	50 - 160 g/m <sup>2</sup>
Duplex printing *	✓	Ports & interfaces	
Maximum resolution *	1200 x 1200 DPI	Standard interfaces	Ethernet, USB 2.0, Wireless LAN
Print speed (black, normal quality, A4/US Letter) *	40 ppm	Direct printing *	✓
Duplex print speed (black, normal quality, A4/US Letter)	20 ppm	USB port	✓
Warm-up time	17 s	USB 2.0 ports quantity	2
Time to first page (black, normal)	6.4 s	Network	
N-in-1 print function	✓	Wi-Fi *	✓
Tray priority settings function	✓	Ethernet LAN *	✓
N-up printing	2, 4	Cabling technology	10/100/1000Base-T(X)
Barcode printing	✓	Ethernet LAN data rates	10,100,1000 Mbit/s
Watermark printing	✓	Wi-Fi standards	802.11b, 802.11g, Wi-Fi 4 (802.11n)
Secure printing	✓	Bluetooth	✗
Booklet printing function	✓	Near Field Communication (NFC)	✗
Poster printing function	✓	Mobile printing technologies	Apple AirPrint, Google Cloud Print, Kyocera Mobile Print, Mopria Print Service
Borderless printing	✗	Performance	
Copying		Maximum internal memory	1536 MB
Duplex copying *	✓		
Duplex copying mode	Auto		

Copying		Performance	
Copying *	Mono copying	Card reader integrated	✓
Maximum copy resolution *	600 x 600 DPI	Internal memory *	512 MB
Copy speed (black, normal quality, A4)	40 cpm	Compatible memory cards	SD, SDHC
Time to first copy (black, normal)	6.4 s	Built-in processor	✓
Maximum number of copies	999 copies	Processor family	ARM Cortex-A9
Copier resize	25 - 400%	Processor frequency	800 MHz
N-in-1 copy function	✓	Sound pressure level (printing)	52 dB
N-in-1 copy function (N=)	2, 4	Sound pressure level (copying)	52 dB
Copy programming function	✓	Sound pressure level (quiet mode)	48 dB
ID-card copy function	✓	Sound power level (standby)	29 dB
Scanning		Design	
Duplex scanning *	✓	Product colour *	Black, White
Duplex scanning mode	Auto	Market positioning *	Business
Scanning *	Colour scanning	Built-in display *	✓
Optical scanning resolution *	600 x 600 DPI	Display	TFT
Scan technology	CIS	Display diagonal	10.9 cm (4.3")
Scan to	E-mail, FTP, SMB, TWAIN, USB, WIA	Touchscreen	✓
Scan speed (colour)	23 ppm	Control type	Touch
Scan speed (black)	40 ppm	Colour display	✓
Duplex scan speed (colour)	16 ppm	Power	
Duplex scan speed (black)	32 ppm	Power consumption (average operating)	661 W
Image formats supported	JPG, TIF	Power consumption (printing)	661 W
Document formats supported	PDF, XPS	Power consumption (copying)	661 W
Scan drivers	TWAIN, WIA	Power consumption (ready)	21 W
Fax		Power consumption (sleep)	1 W
Duplex faxing	✓	Energy Star Typical Electricity Consumption (TEC)	1.74 kWh/week
Faxing *	Mono faxing	AC input voltage	220 - 240 V
Fax resolution (black)	400 x 400 DPI	AC input frequency	50 - 60 Hz
Fax transmission speed	3 sec/page	System requirements	
Modem speed	33.6 Kbit/s	Windows operating systems supported	✓
Speed dialling	✓	Mac operating systems supported	Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.13 High Sierra, Mac OS X 10.14 Mojave, Mac OS X 10.15 Catalina, Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks
Fax coding methods	JBIG, MH, MMR, MR	Linux operating systems supported	✓
Features		Operational conditions	
Recommended duty cycle	1000 - 2500 pages per month	Operating relative humidity (H-H)	10 - 80%
Maximum duty cycle *	50000 pages per month	Storage temperature (T-T)	-20 - 40 °C
Duplex functions *	Copy, Fax, Print, Scan	Operating temperature (T-T)	10 - 32.5 °C
Digital sender	✓	Storage relative humidity (H-H)	10 - 90%
Number of print cartridges *	1	Operating altitude	0 - 3500 m
Printing colours *	Black	Non-operating altitude	0.6 - 15000 m
Page description languages	Microsoft XPS, PCL 5e, PCL 6, PostScript 3	Certificates	
Number of printer fonts	93	Waste Electrical and Electronic Equipment (WEEE) compliance	✓
Replacement cartridges	TK-1170 (7.200 pagina's)	Certification	TUV / GS, CE, ISO 9001, ISO 14001
Input & output capacity		Sustainability	
Total number of input trays *	1	Sustainability certificates	Blue Angel, EPEAT Silver, ENERGY STAR
Total input capacity *	250 sheets	Weight & dimensions	
Total output capacity *	150 sheets	Width	417 mm
Paper tray 1 input capacity	250 sheets		
Multi-Purpose tray	✓		
Multi-Purpose tray input capacity	100 sheets		
Paper input type	Cassette, Paper tray		
Auto document feeder (ADF)	✓		
Auto document feeder (ADF) input capacity	50 sheets		
Maximum number of input trays	3		
Maximum input capacity	850 sheets		
Maximum output capacity	150 sheets		

Paper handling		Weight & dimensions	
Maximum ISO A-series paper size *	A4	Depth	412 mm
Maximum print size	216 x 356 mm	Height	437 mm
Paper tray media types *	Plain paper	Weight	19 kg
ISO A-series sizes (A0...A9) *	A4, A5, A6	<b>Packaging data</b>	
ISO B-series sizes (B0...B9)	B5, B6	Package width	541 mm
Non-ISO print media sizes	Legal, Letter	Package depth	555 mm
Custom media width	70 - 216 mm	Package height	572 mm
Custom media length	148 - 356 mm	Package weight	25 kg
Paper tray media weight	60 - 163 g/m <sup>2</sup>	<b>Packaging content</b>	
Multi-Purpose Tray media weight	60 - 220 g/m <sup>2</sup>	Cartridge(s) included	✓
		Included cartridge capacity (black)	3600 pages
		Imaging unit included	✓
		Cables included	AC
		<b>Logistics data</b>	
		Harmonized System (HS) code	84433100
		<b>Technical details</b>	
		Compliance certificates	REACH, RoHS
		<b>Other features</b>	
		Cartridge type	TK-1170

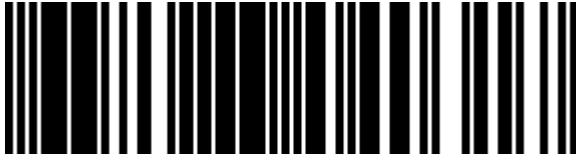

0632983040317



632983040317

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.