

A

B

C

D

E

F

公差要求
Tolerance

0.5~3

>3~6

>6~30

>30~120

>120~400

>400~1000

1000~2000

角度
Angle

f

± 0.05

± 0.05

± 0.10

± 0.15

± 0.20

± 0.30

± 0.50

± 0.5°

m

± 0.10

± 0.10

± 0.20

± 0.30

± 0.50

± 0.80

± 1.20

± 0.5°

c

± 0.20

± 0.30

± 0.50

± 0.80


± 1.20

± 2.00

± 3.00

± 1.0°

1

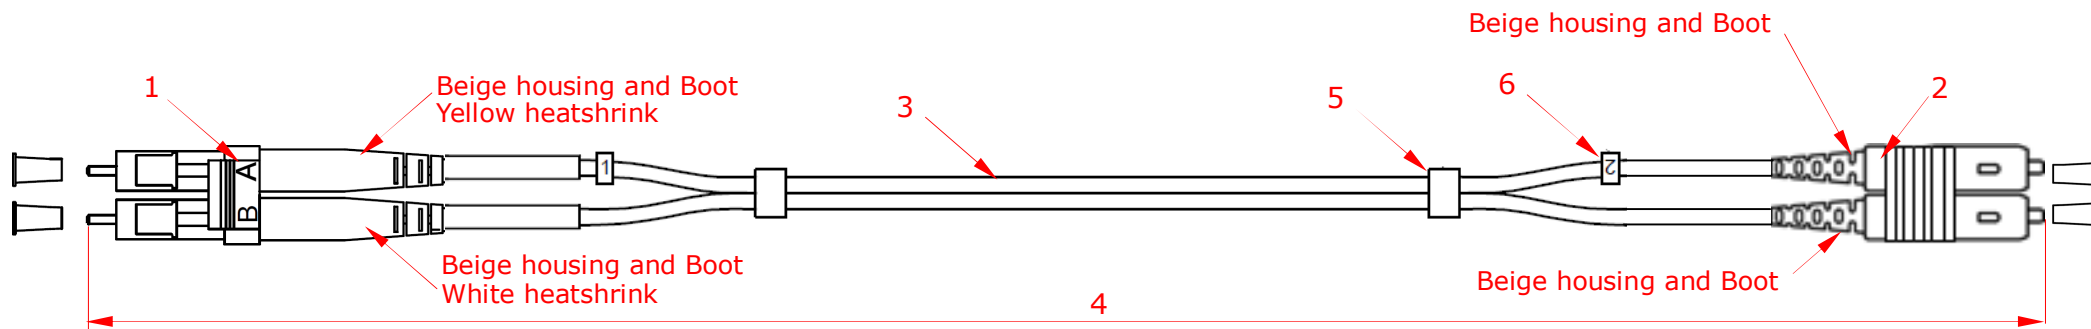

2

3

Specification:

1. Connector Type: Duplex LC/UPC
2. Connector Type: Duplex SC/UPC
3. Cable type:
Zipcord cable, $\Phi 2.0\text{mm}$, OM4 50/125um multimode fiber
Cable jacket: Purple color, LSZH material
4. Length: 2M
5. Shrink Tube
6. Cable Marker



4

Performance:

- a. Insertion Loss: $< 0.4\text{dB}$
- b. Operating Temperature: $-20\sim 70$
- c. Storage Temperature: $-40\sim 80$

路径 Path		材 Material		☑ Drawn By		型号 Model	Duplex Patchcord
档 File		比 Scale		校 Checked By		名 Dwg Name	LCSC-702
日期 Date	2015.06.29	位 Unit	mm	核 Audited By		料 Part No.	LCSC-702
版 Rev.	A	投 Projection	$\square \oplus$	技 TECH Audited By		号 Dwg No.	LCSC-702
第 1 页, 共 1 页 Page : 1/1				核 Approved By		台 TW Part No.	LCSC-702

更
Rev No.更
Changes日期
Date更
Revised By