



## APC Easy 3S UPS-virtalähde Taajuuden kaksoismuunnos (verkossa) 15 kVA 15000 W

Tuotemerkki : APC

Tuotekoodi: E3SUPS15KHB2

Tuotteen nimi : Easy 3S

APC Easy 3S. UPS topologia: Taajuuden kaksoismuunnos (verkossa), Kokonaislähtöteho (VA): 15 kVA, Lähtöteho: 15000 W. Akkuteknologia: Sealed Lead Acid (VRLA), Akun jännite: 240 V. Kotelo: Tower, Tuotteen väri: Valkoinen, Näytön tyyppi: LED. Tuotteen leveys: 380 mm, Tuotteen syvyys: 928 mm, Tuotteen korkeus: 1400 mm. Ulostulojännite: 400 V




Features		Design	
UPS topology *	Double-conversion (Online)	Display type	LED
Output power capacity *	15 kVA	International Protection (IP) code	IP20
Output power *	15000 W	Certification	CE, EAC, IEC 62040-1-1, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE, REACH
Waveform *	Pure sine	<b>Operational conditions</b>	
Input operation voltage (min) *	304 V	Operating temperature (T-T)	0 - 40 °C
Input operation voltage (max) *	477 V	Storage temperature (T-T)	-15 - 40 °C
Input frequency *	45/65 Hz	Operating relative humidity (H-H)	0 - 95%
Output operation voltage (min)	380 V	Storage relative humidity (H-H)	0 - 95%
Output operation voltage (max)	415 V	Operating altitude	0 - 999.9 m
Output frequency	50/60 Hz	Non-operating altitude	0 - 15000 m
Maximum current	28 A	<b>Technical details</b>	
Number of input phases	3	Compliance certificates	RoHS
Number of output phases	3	<b>Weight &amp; dimensions</b>	
Input power factor	0.99	Width	380 mm
Output voltage Total Harmonic Distortion (THD)	3%	Depth	928 mm
Input current Total Harmonic Distortion (THD)	3%	Height	1400 mm
Noise level	60 dB	Weight	436 kg
<b>Battery</b>		Package width	563 mm
Battery technology	Sealed Lead Acid (VRLA)	Package depth	1014 mm
Battery voltage	240 V	Package height	1640 mm
Number of batteries supported	3	Package weight	481 kg
<b>Design</b>		<b>Packaging data</b>	
Form factor *	Tower	Quick installation guide	✓
Product colour *	White		

**Logistics data**

Harmonized System (HS) code	85078000
-----------------------------	----------

**Other features**

Output voltage	400 V
----------------	-------

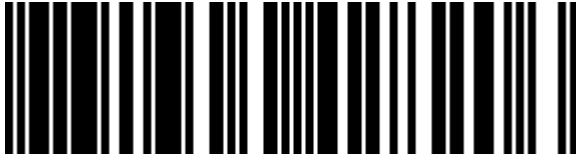

0731304428206



731304428206



8592978120009

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.