




## APC Easy 3S UPS-virtalähde Taajuuden kaksoismuunnos (verkossa) 20 kVA 20000 W

**Tuotemerkki :** APC

**Tuotekoodi:** E3SUPS20KHB1


**Tuotteen nimi :** Easy 3S

APC Easy 3S. UPS topologia: Taajuuden kaksoismuunnos (verkossa), Kokonaislähtöteho (VA): 20 kVA, Lähtöteho: 20000 W. Akkuteknologia: Sealed Lead Acid (VRLA), Akun jännite: 240 V, Tyypillinen varmuuskopioaika täydellä kuormituksella: 15 min. Kotelo: Tower, Tuotteen väri: Valkoinen, Näytön tyyppi: LED. Vaatimustenmukaisuustodistukset: RoHS, Sertifiointi: CE, EAC, IEC 62040-1-1, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE, REACH. Tuotteen leveys: 380 mm, Tuotteen syvyys: 928 mm, Tuotteen korkeus: 1400 mm

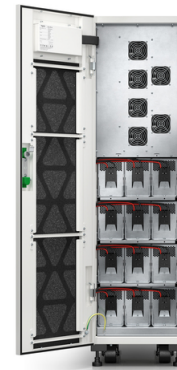

Features		Design	
UPS topology *	Double-conversion (Online)	Product colour *	White
Output power capacity *	20 kVA	Display type	LED
Output power *	20000 W	International Protection (IP) code	IP20
Waveform *	Pure sine	<b>Operational conditions</b>	
Input operation voltage (min) *	304 V	Operating temperature (T-T)	0 - 40 °C
Input operation voltage (max) *	477 V	Storage temperature (T-T)	-15 - 40 °C
Input frequency *	45/65 Hz	Operating relative humidity (H-H)	0 - 95%
Output operation voltage (min)	380 V	Storage relative humidity (H-H)	0 - 95%
Output operation voltage (max)	415 V	Operating altitude	0 - 999.9 m
Output frequency	50/60 Hz	Non-operating altitude	0 - 15000 m
Maximum current	37 A	<b>Certificates</b>	
Number of input phases	3	Compliance certificates	RoHS
Number of output phases	3	Certification	CE, EAC, IEC 62040-1-1, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE, REACH
Input power factor	0.99	<b>Packaging content</b>	
Output voltage Total Harmonic Distortion (THD)	3%	Quick installation guide	✓
Input current Total Harmonic Distortion (THD)	3%	<b>Weight &amp; dimensions</b>	
Noise level	60 dB	Width	380 mm
<b>Battery</b>		Depth	928 mm
Battery technology	Sealed Lead Acid (VRLA)	Height	1400 mm
Battery voltage	240 V	Weight	446 kg
Number of batteries supported	3		
Typical backup time at full load	15 min		

Design		Packaging data	
Form factor *	Tower	Package width	563 mm
		Package depth	1014 mm
		Package height	1640 mm
		Package weight	494 kg
		Logistics data	
		Harmonized System (HS) code	85078000
		Other features	
		Output voltage	400 V

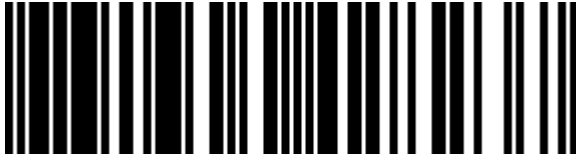

0731304428237



731304428237



8592978121235

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.