



APC Easy 3S UPS-virtalähde Taajuuden kaksoismuunnos (verkossa) 20 kVA 20000 W

Tuotemerkki : APC

Tuotekoodi: E3SUPS20KHB2

Tuotteen nimi : Easy 3S

APC Easy 3S. UPS topologia: Taajuuden kaksoismuunnos (verkossa), Kokonaislähtöteho (VA): 20 kVA, Lähtöteho: 20000 W. Akkuteknologia: Sealed Lead Acid (VRLA), Akun jännite: 240 V, Tyypillinen varmuuskopioaika täydellä kuormituksella: 30 min. Kotelo: Tower, Tuotteen väri: Valkoinen, Näytön tyyppi: LED. Tuotteen leveys: 380 mm, Tuotteen syvyys: 928 mm, Tuotteen korkeus: 1400 mm. Ulostulojännite: 400 V



| Features | | Design | |
|--|----------------------------|------------------------------------|---|
| UPS topology * | Double-conversion (Online) | Product colour * | White |
| Output power capacity * | 20 kVA | Display type | LED |
| Output power * | 20000 W | International Protection (IP) code | IP20 |
| Waveform * | Pure sine | Certification | CE, EAC, IEC 62040-1-1, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE |
| Input operation voltage (min) * | 304 V | Operational conditions | |
| Input operation voltage (max) * | 477 V | Operating temperature (T-T) | 0 - 40 °C |
| Input frequency * | 45/65 Hz | Storage temperature (T-T) | -15 - 40 °C |
| Output operation voltage (min) | 380 V | Operating relative humidity (H-H) | 0 - 95% |
| Output operation voltage (max) | 415 V | Storage relative humidity (H-H) | 0 - 95% |
| Output frequency | 50/60 Hz | Operating altitude | 0 - 999.9 m |
| Maximum current | 37 A | Non-operating altitude | 0 - 15000 m |
| Number of input phases | 3 | Technical details | |
| Number of output phases | 3 | Compliance certificates | RoHS |
| Input power factor | 0.99 | Weight & dimensions | |
| Output voltage Total Harmonic Distortion (THD) | 3% | Width | 380 mm |
| Input current Total Harmonic Distortion (THD) | 3% | Depth | 928 mm |
| Noise level | 60 dB | Height | 1400 mm |
| Battery | | Weight | 446 kg |
| Battery technology | Sealed Lead Acid (VRLA) | Package width | 563 mm |
| Battery voltage | 240 V | Package depth | 1014 mm |
| Number of batteries supported | 3 | Package height | 1640 mm |
| Typical backup time at full load | 30 min | | |

Design

Form factor * Tower

Weight & dimensions

Package weight 494 kg

Packaging data


Quick installation guide ✓

Logistics data

Harmonized System (HS) code 85078000

Other features

Output voltage 400 V

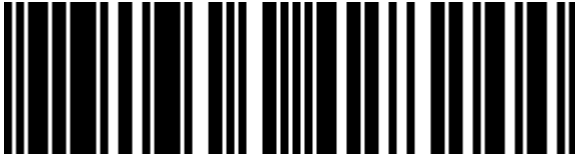

0731304428244



731304428244



8592978121204

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.