




## APC Easy 3S UPS-virtalähde Taajuuden kaksoismuunnos (verkossa) 30 kVA 30000 W

**Tuotemerkki :** APC

**Tuotekoodi:** E3SUPS30KHB2

**Tuotteen nimi :** Easy 3S

APC Easy 3S. UPS topologia: Taajuuden kaksoismuunnos (verkossa), Kokonaislähtöteho (VA): 30 kVA, Lähtöteho: 30000 W. Akkuteknologia: Sealed Lead Acid (VRLA), Akun jännite: 240 V, Tyypillinen varmuuskopioaika täydellä kuormituksella: 25 min. Kotelo: Tower, Tuotteen väri: Valkoinen, Näytön tyyppi: LED. Tuotteen leveys: 500 mm, Tuotteen syvyys: 969 mm, Paino: 584 kg. Ulostulojännite: 400 V

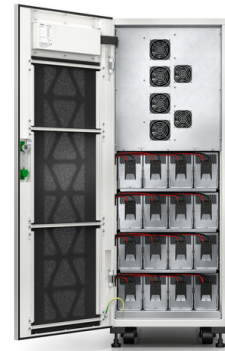

| Features                                       |                            | Design                             |  |
|--|----------------------------|------------------------------------|--|
| UPS topology *                                 | Double-conversion (Online) | Form factor *                      | Tower  |
| Output power capacity *                        | 30 kVA                     | Product colour *                   | White  |
| Output power *                                 | 30000 W                    | Display type                       | LED  |
| Waveform *                                     | Pure sine                  | International Protection (IP) code | IP20   |
| Input operation voltage (min) *                | 304 V                      | Certification                      | CE, EAC, IEC 62040-1-1, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE, REACH |
| Input operation voltage (max) *                | 477 V                      |                                    |  |
| Input frequency *                              | 45/65 Hz                   | Operational conditions             |  |
| Output operation voltage (min)                 | 380 V                      | Operating temperature (T-T)        | 0 - 40 °C  |
| Output operation voltage (max)                 | 415 V                      | Storage temperature (T-T)          | -15 - 40 °C  |
| Output frequency                               | 50/60 Hz                   | Operating relative humidity (H-H)  | 0 - 95%  |
| Maximum current                                | 55 A                       | Storage relative humidity (H-H)    | 0 - 95%  |
| Number of input phases                         | 3                          | Operating altitude                 | 0 - 999.9 m  |
| Number of output phases                        | 3                          | Non-operating altitude             | 0 - 15000 m  |
| Input power factor                             | 0.99                       | Technical details                  |  |
| Output voltage Total Harmonic Distortion (THD) | 3%                         | Compliance certificates            | RoHS   |
| Input current Total Harmonic Distortion (THD)  | 3%                         | Weight & dimensions                |  |
| Noise level                                    | 63 dB                      | Width                              | 500 mm   |
| Battery  |                            | Depth                              | 969 mm   |
| Battery technology                             | Sealed Lead Acid (VRLA)    | Weight                             | 584 kg   |
| Battery voltage                                | 240 V                      | Package width                      | 683 mm   |
| Number of batteries supported                  | 4                          | Package depth                      | 1114 mm  |
| Typical backup time at full load               | 25 min                     | Package height                     | 1640 mm  |
|  |                            | Package weight                     | 638 kg   |

**Packaging data**

Quick installation guide ✓

**Logistics data**

Harmonized System (HS) code 85078000

**Other features**

Output voltage 400 V



0731304428282



731304428282



8592978131609

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.