




## APC Easy UPS 3S UPS-virtalähde Taajuuden kaksoismuunnos (verkossa) 40 kVA 40000 W

**Tuotemerkki :** APC

**Tuotekoodi:** E3SUPS40KHB1

**Tuotteen nimi :** Easy UPS 3S

APC Easy UPS 3S. UPS topologia: Taajuuden kaksoismuunnos (verkossa), Kokonaislähtöteho (VA): 40 kVA, Lähtöteho: 40000 W. Sarjaliitännän tyyppi: RS-232. Akkuteknologia: Sealed Lead Acid (VRLA), Akun jännite: 240 V, Tyypillinen varmuuskopioaika täydellä kuormituksella: 10 min. Kotelo: Tower, Tuotteen väri: Valkoinen, Näytön tyyppi: LCD. Tuotteen leveys: 500 mm, Tuotteen syvyys: 969 mm, Tuotteen korkeus: 1400 mm

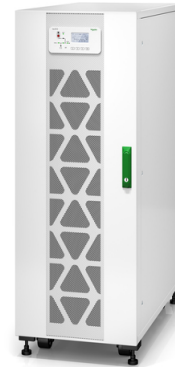

Features		Design	
UPS topology *	Double-conversion (Online)	Form factor *	Tower
Output power capacity *	40 kVA	Product colour *	White
Output power *	40000 W	Display type	LCD
Waveform *	Pure sine	International Protection (IP) code	IP20
Input operation voltage (min) *	304 V	Safety	IEC 62040-1-1
Input operation voltage (max) *	477 V	Certification	CE, EAC, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE, REACH
Input frequency *	50/60 Hz		
Output operation voltage (min)	380 V		
Output operation voltage (max)	400 V		
Output frequency regulation	45 - 65 Hz		
Maximum current	73 A		
Number of input phases	3		
Number of output phases	3		
Efficiency	96%		
Emergency Power Off (EPO)	✓		
Output voltage Total Harmonic Distortion (THD)	3%		
Noise level	63 dB		
Ports & interfaces		Operational conditions	
USB port	✓	Operating temperature (T-T)	0 - 40 °C
Serial interface	✓	Storage temperature (T-T)	-15 - 40 °C
Serial interface type	RS-232	Operating relative humidity (H-H)	0 - 95%
		Storage relative humidity (H-H)	0 - 95%
		Operating altitude	0 - 9999 m
		Non-operating altitude	0 - 15000 m
		Technical details	
		Compliance certificates	RoHS
		Weight & dimensions	
		Width	500 mm
		Depth	969 mm
		Height	1400 mm
		Weight	590 kg
		Package width	683 mm

**Battery**


Battery technology	Sealed Lead Acid (VRLA)
Battery voltage	240 V
Typical backup time at full load	10 min

**Weight & dimensions**

Package depth	1114 mm
Package height	1640 mm
Package weight	643 kg

**Logistics data**

Harmonized System (HS) code	85078000
-----------------------------	----------

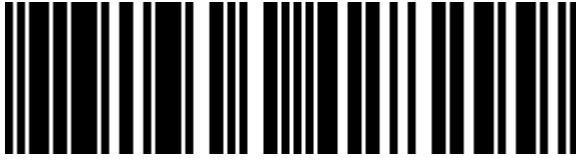

0731304428299



731304428299



8592978409234

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.