

PHILIPS

## Philips B Line 346B1C/00 tietokoneen litteä näyttö 86,4 cm (34") 3440 x 1440 pikseliä Quad HD LCD musta

**Tuotemerkki :** Philips

**Tuoteperhe:** B Line

**Tuotekoodi:** 346B1C/00

**Tuotteen nimi :** 346B1C/00

346B1C Kaartuva UltraWide LCD-näyttö, jossa on USB-C

Philips B Line 346B1C/00 tietokoneen litteä näyttö 86,4 cm (34") 3440 x 1440 pikseliä Quad HD LCD musta:

Philipsin 34-tuumainen kaareva UltraWide-näyttö antaa työstäsi sinut ympäröivän kuvan. All-in-one USB-C-liitäntä ja ergonominen jalustan muotoilu takaavat ihastuttavat työolosuhteet. TUV-sertifioitu näyttö on miellyttävä silmille ja vähentää silmien väsymystä.


Philips B Line 346B1C/00. Näytön halkaisija: 86,4 cm (34"), Näytön erottelutarkkuus: 3440 x 1440 pikseliä, HD-tyyppi: Quad HD, Näytön teknologia: LCD, Näytön pinta: Matta, Vasteaika (tyypillinen): 4 ms, Vakiokuvasuhde: 21:9, Katselukulma, vaakasuora: 178°, Katselukulma, pystysuora: 178°. Sisäiset kaiuttimet. Sisäänrakennettu USB-keskus, USB-keskuksen versio: 3.2 Gen 1 (3.1 Gen 1). VESA-kiinnitys, Korkeudensäätö. Tuotteen väri: musta



Display		Ergonomics	
Display diagonal *	86.4 cm (34")	VESA mounting *	✓
Display resolution *	3440 x 1440 pixels	Panel mounting interface	100 x 100 mm
HD type *	Quad HD	Cable lock slot *	✓
Native aspect ratio *	21:9	Cable lock slot type	Kensington
Display technology *	LCD	Height adjustment *	✓
Panel type *	VA	Adjustable height (max)	18 cm
Backlight type	W-LED	Swivelling	✓
Touchscreen *	✗	Swivel angle range	-180 - 180°
Display brightness (typical)	300 cd/m <sup>2</sup>	Tilt adjustment	✓
Response time *	4 ms	Tilt angle range	-5 - 30°
Display surface	Matt	Picture-in-Picture	✓
Anti-glare screen	✓	On Screen Display (OSD)	✓
Screen shape *	Curved	On Screen Display (OSD) languages	Simplified Chinese, Traditional Chinese, Czech, German, Dutch, English, Spanish, Finnish, French, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Swedish, Turkish, Ukrainian
Screen curvature rating	1500R	Plug and Play	✓
Supported graphics resolutions	3440 x 1440	LED indicators	Operation, Stand-by
Aspect ratio	21:9	<b>Power</b>	
Contrast ratio (typical) *	3000:1	Energy efficiency class (SDR) *	G
Contrast ratio (dynamic)	80000000:1	Energy consumption (SDR) per 1000 hours *	35 kWh
Dynamic contrast ratio marketing name	SmartContrast	Power consumption (typical) *	28.36 W
Maximum refresh rate *	100 Hz	Power consumption (standby) *	0.3 W
Viewing angle, horizontal	178°	Power consumption (PowerSave)	34 W
Viewing angle, vertical	178°	AC input voltage	100 - 240 V
Display number of colours *	16.7 million colours	AC input frequency	50 - 60 Hz
Pixel pitch	0.23175 x 0.23175 mm		
Pixel density	110 ppi		
Horizontal scan range	30 - 160 kHz		
Vertical scan range	48 - 100 Hz		
Viewable size, horizontal	79.7 cm		

<b>Display</b>		<b>Power</b>	
Viewable size, vertical	33.4 cm	Power supply type	Internal
Digital horizontal frequency	30 - 160 kHz	Energy efficiency scale	A to G
Digital vertical frequency	48 - 100 Hz	European Product Registry for Energy Labelling (EPREL) code	420504
Display diagonal (metric)	86.36 cm	External power adapter	✗
DDC/CI	✓	<b>Operational conditions</b>	
Haze rate	25%	Operating temperature (T-T)	0 - 40 °C
Surface hardness	2H	Storage temperature (T-T)	-20 - 60 °C
Colour gamut standard	sRGB	Operating relative humidity (H-H)	20 - 80%
Colour gamut	100%	Operating altitude	0 - 3658 m
sRGB coverage (typical)	119%	Non-operating altitude	0 - 12192 m
NTSC coverage (typical)	100%	<b>Weight &amp; dimensions</b>	
Adobe RGB coverage	90%	Width (with stand)	807 mm
Screen curvature	150 cm	Depth (with stand)	250 mm
3D	✗	Height (with stand)	601 mm
Display sRGB	✓	Weight (with stand)	11.5 kg
<b>Performance</b>		Width (without stand)	807 mm
VESA Adaptive Sync support	✓	Depth (without stand)	110 mm
Component video sync	Separate sync	Height (without stand)	367 mm
Flicker-free technology	✓	Weight (without stand)	7.79 kg
Low Blue Light technology	✓	<b>Packaging data</b>	
Windows operating systems supported	Windows 10, Windows 7, Windows 8, Windows 8.1	Package width	930 mm
Mac operating systems supported	Mac OS X 10.0 Cheetah, Mac OS X 10.1 Puma, Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.13 High Sierra, Mac OS X 10.14 Mojave, Mac OS X 10.2 Jaguar, Mac OS X 10.3 Panther, Mac OS X 10.4 Tiger, Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks	Package depth	282 mm
<b>Multimedia</b>		Package height	525 mm
Number of speakers	2	Package weight	15.3 kg
RMS rated power	10 W	Package type	Box
Built-in speaker(s) *	✓	<b>Packaging content</b>	
Built-in camera *	✗	Stand included	✓
<b>Design</b>		Cables included	HDMI, DisplayPort, USB Type-C, AC
Market positioning *	Home	Manual	✓
Product colour *	Black	Bundled software	SmartControl
Front bezel colour	Black	<b>Sustainability</b>	
Feet colour	Black	Sustainability certificates	ENERGY STAR, TCO
<b>Ports &amp; interfaces</b>		Doesn't contain	Mercury, PVC/BFR
Built-in USB hub *	✓	<b>Other features</b>	
USB hub version	3.2 Gen 1 (3.1 Gen 1)	On/off switch	✓
USB upstream port type	USB Type-B, USB Type-C	USB Power Delivery revision	3.0
Number of upstream ports	2	TV tuner integrated	✗
USB Type-A downstream ports quantity	4	Picture-by-Picture (PbP)	✓
USB Type-C DisplayPort Alternate Mode	✓	Exterior finish type	Textured
USB Power Delivery (USB PD)	✓	Recyclable packaging material	100%
USB Power Delivery up to	90 W	Heavy metals free	Hg (mercury), Pb (lead)
DVI port	✗	Light sensor	✓
HDMI *	✓	EasyRead mode	✓
HDMI ports quantity	1	LowBlue mode	✓
HDMI version	2.0	Philips SmartUniformity	93 - 105%
DisplayPorts quantity	1	Picture enhancement	SmartImage
		MultiView	PIP/PBP mode, 2 x devices
		Regulatory Approvals	CB; EPA; cETLus; FCC Class B; ICES-003; CE Mark; TUV/GS; TUV Ergo; SEMKO; CU-EAC; UKRAINIAN; TUV Eye Comfort certified
		Delta E	2
		Compliance certificates	RoHS
		Mean time between failures (MTBF)	70000 h
		Ethernet LAN data rates	10,100,1000 Mbit/s
		Wake-on-LAN	✓

Ports & interfaces		Other features	
DisplayPort version	1.2	Certification	CB, EPA, cETLus, FCC Class B, ICES-003, CE Mark, TUV/GS, TUV Ergo, SEMKO, CU-EAC, UKRAINIAN, TUV Eye Comfort certified
Audio input	✘		
Headphone out *	✔		
Headphone outputs	1		
Headphone connectivity	3.5 mm		
HDCP	✔	<b>Logistics data</b>	
HDCP version	1.4/2.2	Harmonized System (HS) code	85285210
Network			
Ethernet LAN	✔		

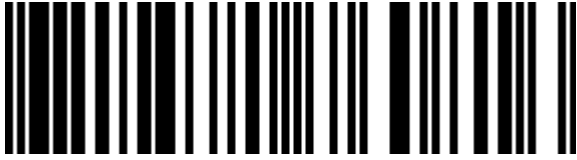

8712581760816

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 24-FEB-2025. Prints or copies of Information are only valid on the printed Publication date