Canon

Canon PIXMA TS5151 Mustesuihku A4 4800 x 1200 DPI Wi-Fi

Tuotemerkki : Canon   **Tuoteperhe:** PIXMA   **Tuotekoodi:** 2228C026

Tuotteen nimi : TS5151

Canon PIXMA TS5151. Tulostustekniikka: Mustesuihku, Tulostus: Väritulostus, Suurin resoluutio: 4800 x 1200 DPI. Kopiointi: Värikopiointi. Skannaus: Väriskannaus, Optinen skannauserottelutarkkuus: 1200 x 2400 DPI. Suurin ISO A-luokan paperikoko: A4. Wi-Fi. Tuotteen väri: Valkoinen
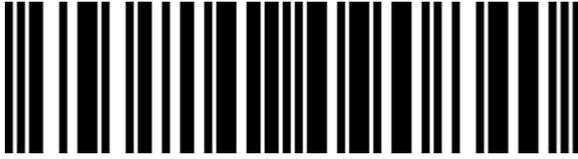
Printing

Duplex printing mode	Auto
Print technology *	Inkjet
Printing *	Colour printing
Duplex printing *	✔
Maximum resolution *	4800 x 1200 DPI
Print speed (ISO/IEC 24734) mono	13.8 ipm
Print speed (ISO/IEC 24734) colour	6.8 ipm

Copying

Copying *	Colour copying
Maximum number of copies	99 copies
Copier resize	25 - 400%

Scanning

Scanning *	Colour scanning
Optical scanning resolution *	1200 x 2400 DPI
Maximum scan area	216 x 297 mm
Scanner type *	Flatbed scanner
Scan technology	CIS
Input colour depth	16 bit
Output colour depth	16 bit

Fax

Faxing *	✘

Input & output capacity

Total input capacity *	100 sheets
Paper input type	Cassette, Paper tray

Paper handling

Maximum ISO A-series paper size *	A4
Paper tray media types *	Envelopes, Glossy paper, Photo paper, Plain paper
ISO A-series sizes (A0...A9) *	A4, A5
ISO B-series sizes (B0...B9)	B5
Non-ISO print media sizes	Legal
Envelopes sizes	Com-10, DL

Paper handling

Borderless printing media sizes	10x15, 13x18, 13x13, 20x25
Auto Document Feeder (ADF) media weight	64 - 105 g/m²

Ports & interfaces

Standard interfaces	USB 2.0, Wireless LAN
USB port	✔

Network

Wi-Fi *	✔
Wi-Fi standards	802.11b, 802.11g, Wi-Fi 4 (802.11n)
Mobile printing technologies	Apple AirPrint, Google Cloud Print, Mopria Print Service, PIXMA Cloud Link

Design

Product colour *	White
Market positioning *	Home & office
Built-in display *	✔
Display	LCD

Power

Power consumption (scanning)	11 W
Power consumption (standby)	0.7 W
Power consumption (off)	0.2 W
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz

Operational conditions

Operating relative humidity (H-H)	10 - 80%
Operating temperature (T-T)	15 - 30 °C

Weight & dimensions

Width	425 mm
Depth	315 mm
Height	147 mm
Weight	6.5 kg

Logistics data

Harmonized System (HS) code	84433100

Other features

PictBridge   ✔

4549292090840