



APC BX2200MI-GR UPS-virtalähde Linjainteraktiivinen 2,2 kVA 1200 W 4 AC-pistorasia(a)

Tuotemerkki : APC

Tuotekoodi: BX2200MI-GR

Tuotteen nimi : BX2200MI-GR

APC BX2200MI-GR. UPS topologia: Linjainteraktiivinen, Kokonaislähtöteho (VA): 2,2 kVA, Lähtöteho: 1200 W. Pistorasian tyypit: Tyyppi F, Virtapistoke: Tyyppi F, Ulostulojen määrä: 4 AC-pistorasia(a).

Akkuteknologia: Sealed Lead Acid (VRLA), Tyypillinen varmuuskopioaika täydellä kuormituksella: 1 min, Tyypillinen varmuuskopioaika puolikkaalla kuormituksella: 8,5 min. Kotelo: Kompakti, Tuotteen väri: musta, Johdon pituus: 1,2 m. Vaatimustenmukaisuustodistukset: RoHS, Sertifiointi: CB Meet EN62040-1 / CE / IEC-62040-1 / IEC-62040-2



Features		Battery	
UPS topology *	Line-Interactive	Typical backup time at half load	8.5 min
Output power capacity *	2.2 kVA	Battery life (max)	2 year(s)
Output power *	1200 W	Battery recharge time	8 h
Waveform *	Sine	Design	
Input operation voltage (min) *	140 V	Form factor *	Compact
Input operation voltage (max) *	300 V	Cable length	1.2 m
Input frequency *	50/60 Hz	Product colour *	Black
Output operation voltage (min)	230 V	LED indicators	✓
Output operation voltage (max)	230 V	International Protection (IP) code	IP20
Output frequency	50/60 Hz	Operational conditions	
Output frequency regulation	0.5 Hz	Operating temperature (T-T)	0 - 40 °C
Output voltage regulation	10%	Storage temperature (T-T)	-15 - 40 °C
Automatic Voltage Regulation (AVR)	✓	Operating relative humidity (H-H)	0 - 95%
Surge energy rating	273 J	Operating altitude	0 - 3000 m
Response time	6 ms	Certificates	
Input power factor	0.54	Compliance certificates	RoHS
Noise level	40 dB	Certification	CB Meet EN62040-1 / CE / IEC-62040-1 / IEC-62040-2
Surge protection	✓	Packaging content	
Audible alarm(s)	✓	Cables included	Input power cable
Audible alarm modes	Low battery alarm	Manual	✓
Ports & interfaces		Weight & dimensions	
AC outlet types	Type F	Width	140 mm
Power plug	Type F	Depth	390 mm
AC outlets quantity	4 AC outlet(s)	Height	190 mm
USB port	✓	Weight	12.3 kg
USB 2.0 ports quantity	1		
USB port type	USB Type-B		

Battery


Battery technology	Sealed Lead Acid (VRLA)
Typical backup time at full load	1 min

Packaging data

Package width	235 mm
Package depth	495 mm
Package height	297 mm
Package weight	13.3 kg

Logistics data

Harmonized System (HS) code	85078000
-----------------------------	----------

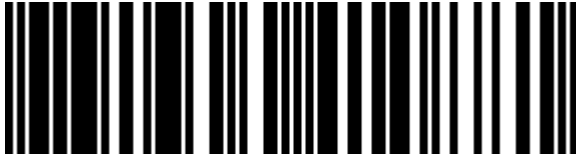

0731304410881



731304410881

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.