




APC SMTL1500RM13UC UPS-virtalähde Linjainteraktiivinen 1,5 kVA 1350 W 6 AC-pistorasia(a)

Tuotemerkki : APC

Tuotekoodi: SMTL1500RM13UC

Tuotteen nimi : SMTL1500RM13UC




APC SMTL1500RM13UC. UPS topologia: Linjainteraktiivinen, Kokonaislähtöteho (VA): 1,5 kVA, Lähtöteho: 1350 W. Pistorasian tyypit: C13 liitin, Ulostulojen määrä: 6 AC-pistorasia(a), USB-portin tyyppi: USB A-tyyppi. Akkuteknologia: Litiumioni (Li-Ion), Akun kestoikä (maks.): 10 vuosi/vuosia, Akun latausaika: 3 h. Kotelo: Telineasennettava, Tuotteen väri: Harmaa, Telineen kapasiteetti: 3U.

Vaatimustenmukaisuustodistukset: RoHS, Sertifiointi: CE, CSA, EAC, GS Mark, IEC 62040-1-1, IEC 62040-1-2, IEC 62040-2, RCM, UL 1973 REACH



Features		Design	
UPS topology *	Line-Interactive	Form factor *	Rackmount
Output power capacity *	1.5 kVA	Rack capacity	3U
Output power *	1350 W	Product colour *	Grey
Waveform *	Sine	Display type	LCD
Input operation voltage (min) *	151 V	International Protection (IP) code	IP20
Input operation voltage (max) *	302 V	Operational conditions	
Input frequency *	50/60 Hz	Operating temperature (T-T)	0 - 40 °C
Output operation voltage (min)	220 V	Storage temperature (T-T)	-40 - 35 °C
Output operation voltage (max)	240 V	Operating relative humidity (H-H)	0 - 95%
Output frequency	50/60 Hz	Storage relative humidity (H-H)	0 - 95%
Surge energy rating	680 J	Operating altitude	0 - 3000 m
Response time	6 ms	Non-operating altitude	0 - 7500 m
Output voltage Total Harmonic Distortion (THD)	5%	Certificates	
Noise level	45 dB	Compliance certificates	RoHS
Audible alarm(s)	✓	Certification	CE, CSA, EAC, GS Mark, IEC 62040-1-1, IEC 62040-1-2, IEC 62040-2, RCM, UL 1973 REACH
Audible alarm modes	Alarm when on battery	Weight & dimensions	
Ports & interfaces		Width	438 mm
AC outlet types	C13 coupler	Depth	302 mm
AC outlets quantity	6 AC outlet(s)	Height	131 mm
USB port	✓	Weight	19.5 kg
USB port type	USB Type-A	Packaging data	
Serial interface type	RJ-45	Package width	584 mm
SmartSlot	✓	Package depth	448 mm
Battery		Package height	279 mm
Battery technology	Lithium-Ion (Li-Ion)	Package weight	22.7 kg
Battery life (max)	10 year(s)	Logistics data	
Battery recharge time	3 h	Products per pallet	12 pc(s)
		Harmonized System (HS) code	85078000
		Total carbon footprint (kg of CO2e)	2052.73

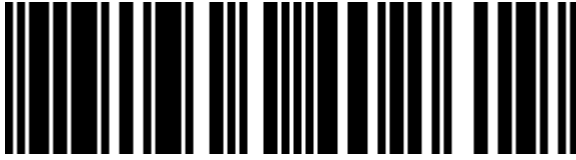

0731304402619



731304402619

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.