**be quiet!**

# be quiet! Pure Power 11 400W virtalähdeyksikkö 20+4 pin ATX ATX musta

**Tuotemerkki :** be quiet!　　　　　　　　　　　　**Tuotekoodi:** BN292
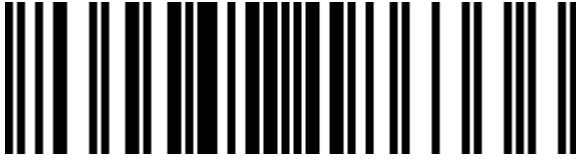
**Tuotteen nimi :** Pure Power 11 400W

be quiet! Pure Power 11 400W. Kokonaisteho: 400 W, AC-syöttöjännite: 100 - 240 V, Huipputeho: 450 W. Emolevyn virtaliitin: 20+4 pin ATX, Emolevyn virtapiuhan pituus: 45 cm, SATA-virtakaapelin pituus: 450,600,750 mm. Tarkoitus: PC, Virransyöttöyksikön mitat: ATX, 80 PLUS certification: 80 PLUS Gold. Tuotteen väri: musta, Tuulettimen halkaisija: 12 cm, Tuulettimien määrä: 1 tuuletin(ta). Tuotteen leveys: 150 mm, Tuotteen syvyys: 150 mm, Tuotteen korkeus: 86 mm



## Power

| | |
|---|---|
| Total power * | 400 W |
| Peak power | 450 W |
| AC input voltage * | 100 - 240 V |
| AC input frequency | 50 - 60 Hz |
| Input current | 6 A |
| Power factor | 0.99 |
| Power Factor Correction (PFC) type | Active |
| Combined power (+3.3V) | 120 W |
| Combined power (+12V) | 384 W |
| Combined power (+5V) | 120 W |
| Combined power (-12V) | 3.6 W |
| Combined power (+5Vsb) | 15 W |
| Max output current (+3.3V) | 24 A |
| Max output current (+12V1) | 24 A |
| Max output current (+12V2) | 20 A |
| Max output current (+5V) | 15 A |
| Max output current (-12V) | 0.3 A |
| Max output current (+5Vsb) | 3 A |
| Hold time | 29 ms |
| Efficiency | 92% |
| Power protection features | Over current, Over power, Over voltage, Overheating, Short circuit, Under voltage |

## Ports & interfaces

| | |
|---|---|
| Motherboard power connector * | 20+4 pin ATX |
| Motherboard power cable length | 45 cm |
| Number of SATA power connectors | 5 |
| Number of PATA power connectors | 2 |
| SATA power cable length | 450,600,750 mm |
| PCI Express power connectors (6+2 pin) | 2 |
| PCI Express power cable length | 50 cm |

## Performance

| | |
|---|---|
| Power supply unit (PSU) form factor * | ATX |
| ATX version | 2.4 |
| Bearing technology | Rifle |
| Safety | CE, CB, TÜV, FCC, cTUVus, RCM, BSMI, CU, CCC |
| Certification | ErP, WEEE |

## Design

| | |
|---|---|
| Product colour | Black |
| Fan diameter | 12 cm |
| Number of fans | 1 fan(s) |

## Weight & dimensions

| | |
|---|---|
| Width | 150 mm |
| Depth | 150 mm |
| Height | 86 mm |
| Weight | 1.93 kg |

## Packaging data

| | |
|---|---|
| Manual | ✔ |
| Package width | 210 mm |
| Package depth | 240 mm |
| Package height | 96 mm |
| Package weight | 2.22 kg |
| Package type | Box |

## Technical details

| | |
|---|---|
| Sustainability certificates | ENERGY STAR |
| Compliance certificates | RoHS |

## Logistics data

| | |
|---|---|
| Master (outer) case width | 326 mm |
| Master (outer) case length | 514 mm |
| Master (outer) case height | 241 mm |

## Ports & interfaces

| | |
|---|---|
| CPU power connector (4+4 pin) | ✔ |
| CPU power cable length | 6 cm |
| Floppy disk drive connector | ✔ |
| Cabling type | Non-Modular |

## Performance

| | |
|---|---|
| 80 PLUS certification * | 80 PLUS Gold |
| Purpose * | PC |

## Logistics data

| | |
|---|---|
| Master (outer) case gross weight | 14.5 kg |
| Harmonized System (HS) code | 84733020 |
| Products per master (outer) case | 6 pc(s) |

## Other features

| | |
|---|---|
| Screws included | ✔ |
| Cable ties included | ✔ |
| Noise level (silent mode, <30%) | 10.5 dB |
| Noise level (quiet mode, 50%) | 11.4 dB |
| Noise level (full-load mode, 100%) | 14.9 dB |

4260052186336