


RAM® FACE PLATE ASSEMBLY INSTRUCTIONS

RAM Face Plate Assembly Instruction for 1", 2", 3" and 4" Custom Face Plates, Filler Plates and Other Faceplate Accessories

PARTS INDEX:


- A. RAM FACEPLATE (QTY. 1)
- B. SIDE LEG FOR FACEPLATE (QTY. 2)
(FOR CUSTOM FACEPLATES ONLY)
- C. #10-24 X 3/8" SELF-TAPPING SCREW (QTY. 4)
(FOR CUSTOM FACEPLATES ONLY)
- D. COMPOSITE LOCKING LUG (QTY. 2)
- E. #6-32 NYLOCK NUT (QTY. 2)
- F. #6-32 X 1" HEX SOCKET SCREW (QTY. 2)

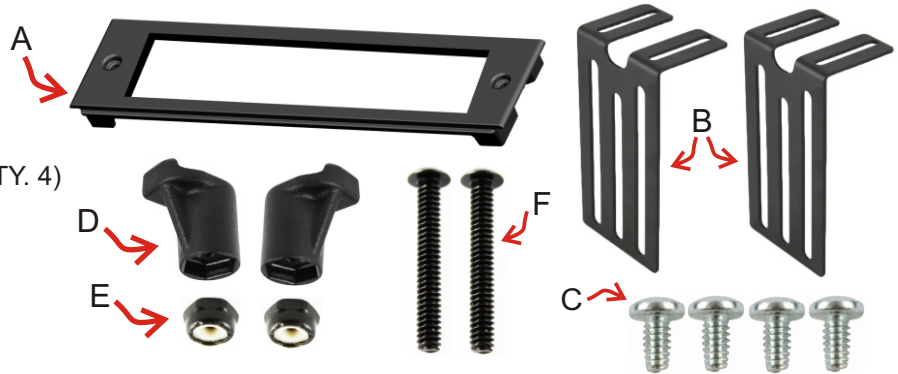

If mounting Filler Faceplate, Internal Drink Cup Holder, Cigarette Adapter Plate, or other Non-Custom Faceplate Accessory, follow Step 1 and then skip to Step 5.

1. Attach (D) Locking Lugs to the bottom of each side of each side of (A) Faceplate using (F) Screws and (E) Nuts. Thread (E) Nuts by hand only. **Do not tighten until Step 6.**

2. Position (B) Side Legs against your device (top portions facing outward). Before attaching, measure total length of your device with the additional (B) Side Legs. To fit in RAM Console, **total length must be 8" long**. Mark the appropriate ridges under the (B) Side Legs, and cut Side Legs to appropriate length. (Before cutting, please read the NPI Returns & Exchanges Policy at the bottom of this guide). To verify correct measurements, align device and side legs to bottom edges of (A) Faceplate. The length of your device plus both side legs must not pass bottom edges of Faceplate. Once both (B) Side Legs have been cut and measurements have been verified, attach Side Legs to device using the factory hardware included with your device.

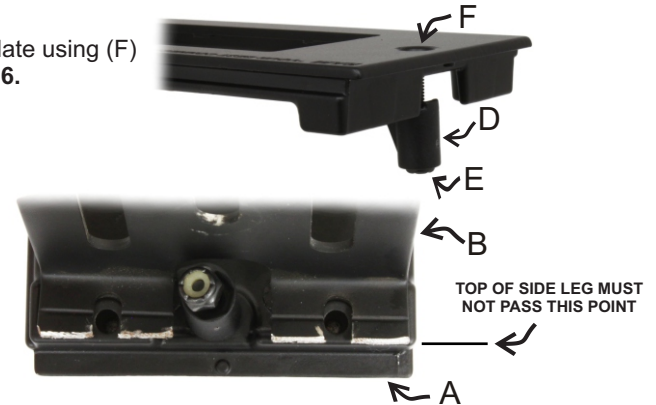

3. With (B) Side Legs attached to your device, align top slotted holes of (B) Side Legs with 4 inside holes of (A) Faceplate. Match your device to inside of (A) Faceplate (be sure device is at proper elevation, not below faceplate surface). When properly aligned, attach (B) side legs to inside holes of (A) Faceplate using (C) Self-Tapping Screws.

4. Make any electrical connections at this point.

5. Holding your assembly upright, make sure (D) Locking Lugs are secured over (E) Nuts. Lower the assembly into your RAM Console Box, allowing (D) Locking Lugs to pass through the opening. Under each side of (A) Faceplate is a small pin. When positioning faceplate, these pins must secure inside one of the side holes of the console box.



6. Once faceplate assembly is in place, use an allen key to tighten (F) Screws. By tightening these screws, (D) Locking Lugs will rotate to lock under side edges of your console box. Tighten (F) Screws all the way down to keep Locking Lugs secure.

7. Repeat these steps for each device to be mounted in your RAM Console Box.

Disclaimer regarding mounting of product:

National Products Inc. and/or RAM Mounting Systems is not liable under any theory of contract or tort law for any loss, damage, personal injury, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicles or any other application. In order to safely install and use RAM Mounting System or National Products Inc. products full consideration of vehicle occupants, vehicle systems (i.e. the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. RAM Mounting Systems and National Products Inc. specifically disclaims and responsibility for the improper use or installation of its products not consistent with the original vehicle manufacturers specifications and recommendations. RAM Mounting Systems and National Products Inc. product instruction sheets, or workmanship standards as endorsed through the RAM Mounting Systems and National Products Inc. Certified Installer program. RAM Mounting Systems and National Products Inc. product instruction sheets, or workmanship standards as endorsed through the RAM Mounting Systems and National Products Inc. Certified Installer program.

NPI Returns & Exchanges Policy:

For products purchased directly from National Products Inc., exchanges and/or returns for credit are acceptable up to 30 days after original ship date, excluding all shipping charges. Returns and/or exchanges beyond 30 days after original ship date will result in a 15% restocking fee. Any product that has been damaged, cut or altered in any way or form cannot be exchanged or returned for credit under any circumstances. For product alterations recommended by any National Products Inc. instruction guide, please use caution and verify that your components are compatible for your mounting needs before altering. For any questions or inquiries regarding this policy, contact National Products Inc. using the info provided below.

RAM Mounting Systems

8410 Dallas Ave S
Seattle, WA 98108
Phone: (206) 763-8361
Fax: (206) 763-9615
www.rammount.com
support@rammount.com



RMR-INS-FP