



APC BVX900LI-GR UPS-virtalähde Linjainteraktiivinen 0,9 kVA 480 W 2 AC-pistorasia(a)

Tuotemerkki : APC

Tuotekoodi: BVX900LI-GR


Tuotteen nimi : BVX900LI-GR

APC BVX900LI-GR. UPS topologia: Linjainteraktiivinen, Kokonaislähtöteho (VA): 0,9 kVA, Lähtöteho: 480 W. Pistorasian tyypit: Tyyppi F, Virtapistoke: Tyyppi F, Ulostulojen määrä: 2 AC-pistorasia(a). Akkuteknologia: Sealed Lead Acid (VRLA), Akun kapasiteetti: 9 ah, Akun jännite: 12 V. Kotelo: Kompakti, Tuotteen väri: musta, International Protection (IP)-koodi: IP20. Sertifiointi: CB, CE, EN/IEC 62040-1, EN/IEC 62040-2



Features		Battery	
UPS topology *	Line-Interactive	Battery life (max)	2 year(s)
Output power capacity *	0.9 kVA	Battery recharge time	8 h
Output power *	480 W	Cold start	✓
Waveform *	Sine		
Input operation voltage (min) *	170 V		
Input operation voltage (max) *	280 V		
Input frequency *	50/60 Hz		
Output operation voltage (min)	230 V		
Output operation voltage (max)	230 V		
Output frequency	50/60 Hz		
Output frequency regulation	0.5 Hz		
Output voltage regulation	10%		
Automatic Voltage Regulation (AVR)	✓		
Surge energy rating	273 J		
Response time	6 ms		
Input power factor	0.53		
Noise level	40 dB		
Surge protection	✓		
Audible alarm(s)	✓		
Audible alarm modes	Alarm when on battery, Battery replacement, Low battery alarm, Overload alarm		
Ports & interfaces		Design	
AC outlet types	Type F	Form factor *	Compact
Power plug	Type F	Product colour *	Black
AC outlets quantity	2 AC outlet(s)	LED indicators	✓
		International Protection (IP) code	IP20
		Operational conditions	
		Operating temperature (T-T)	0 - 40 °C
		Storage temperature (T-T)	-15 - 40 °C
		Operating relative humidity (H-H)	0 - 95%
		Operating altitude	0 - 3000 m
		Non-operating altitude	0 - 3000 m
		Certificates	
		Certification	CB, CE, EN/IEC 62040-1, EN/IEC 62040-2
		Packaging content	
		Cables included	Input power cable
		Manual	✓
		Weight & dimensions	
		Width	120 mm
		Depth	355 mm
		Height	160 mm

Battery		Weight & dimensions	
Battery technology	Sealed Lead Acid (VRLA)	Weight	6 kg
Battery capacity	9 Ah	Packaging data	
Battery voltage	12 V	Package width	197 mm
		Package depth	430 mm
		Package height	250 mm
		Package weight	6.5 kg
		Logistics data	
		Harmonized System (HS) code	85078000

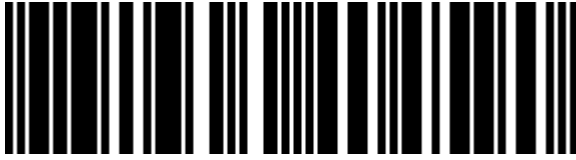

0731304404590



731304404590

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.