

Lenovo


Lenovo 4XG7A14812 suoritin 2,1 GHz 11 MB Smart Cache

Tuotemerkki : Lenovo**Tuotekoodi**: 4XG7A14812**Tuotteen nimi** : 4XG7A14812

Lenovo 4XG7A14812. Suoritinperhe: Intel® Xeon Silver, Prosessorin kanta: LGA 3647 (Socket P), Prosessorin litografia: 14 nm. Muistikanavat: Hexa-kanava, Prosessorin tukema suurin sisäinen muisti: 1 TB, Prosessorin tukemat muistityypit: DDR4-SDRAM. Markkinasegmentti: Palvelin, Tuetut ohjepaketit: AVX-512, Skaalautuvuus: 2S. Prosessorin pakkausko: 76 x 56.5 mm. Yhteensopivuus: ThinkSystem ST550



Processor		Features	
Processor generation	2nd Generation Intel® Xeon® Scalable	PCI Express slots version	3.0
Processor model *	4208	Supported instruction sets	AVX-512
Processor base frequency *	2.1 GHz	Scalability	2S
Processor family *	Intel Xeon Silver	Embedded options available	✗
Processor cores *	8	Processor special features	
Processor socket *	LGA 3647 (Socket P)	Intel® Hyper Threading Technology (Intel® HT Technology)	✓
Component for	Server/workstation	Intel® Turbo Boost Technology	2.0
Processor lithography *	14 nm	Intel® AES New Instructions (Intel® AES-NI)	✓
Processor series	Intel Xeon Silver 4000 Series	Enhanced Intel SpeedStep Technology	✓
Processor threads	16	Intel Trusted Execution Technology	✓
Processor operating modes *	64-bit	Intel® Speed Shift Technology	✓
Processor boost frequency	3.2 GHz	Intel VT-x with Extended Page Tables (EPT)	✓
Processor cache	11 MB	Intel TSX-NI	✓
Processor cache type	Smart Cache	Intel 64	✓
Thermal Design Power (TDP)	85 W	Intel Virtualization Technology (VT-x)	✓
Bus type	UPI	Intel Virtualization Technology for Directed I/O (VT-d)	✓
Processor codename	Cascade Lake	Intel Turbo Boost Max Technology 3.0	✗
Memory		Intel® vPro™ Platform Eligibility	✓
Maximum internal memory supported by processor	1 TB	Operational conditions	
Memory types supported by processor	DDR4-SDRAM	Tcase	78 °C
Memory clock speeds supported by processor	2400 MHz	Logistics data	
Memory channels *	Hexa-channel	Harmonized System (HS) code	85423119
ECC	✓	Weight & dimensions	
Graphics		Processor package size	76 x 56.5 mm
On-board graphics card *	✗	Other features	
Discrete graphics card *	✗	Compatibility	ThinkSystem ST550
On-board graphics card model *	Not available		
Discrete graphics card model *	Not available		
Features			
Execute Disable Bit	✓		
Market segment	Server		
Maximum number of PCI Express lanes	48		

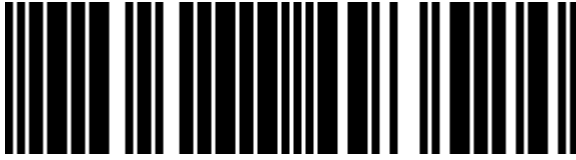

0889488493524



889488493524

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.