



## APC SRTG15KXLI UPS-virtalähde Taajuuden kaksoismuunnos (verkossa) 15 kVA 15000 W

**Tuotemerkki :** APC

**Tuotekoodi:** SRTG15KXLI


**Tuotteen nimi :** SRTG15KXLI

APC SRTG15KXLI. UPS topologia: Taajuuden kaksoismuunnos (verkossa), Kokonaislähtöteho (VA): 15 kVA, Lähtöteho: 15000 W. Pistorasian tyypit: Hard Wire 5-wire (3P + N + E), Virtapistoke: Hardwire, Sarjaliitännän tyyppi: RS-232. Akkuteknologia: Sealed Lead Acid (VRLA), Akun jännite: 192 V, Akun kestoikä (maks.): 5 vuosi/vuosia. Kotelo: Telineasennettava/Torni, Tuotteen väri: musta, Telineen kapasiteetti: 7U. Sisältää johdot: RS-232



Features		Battery	
UPS topology *	Double-conversion (Online)	Battery voltage	192 V
Output power capacity *	15 kVA	Battery life (max)	5 year(s)
Output power *	15000 W	Battery recharge time	4 h
Waveform *	Sine	Cold start	✓
Input operation voltage (min) *	160 V		
Input operation voltage (max) *	415 V		
Input frequency *	40/70 Hz		
Output operation voltage (max)	230 V		
Output frequency	50/60 Hz		
Output frequency regulation	0.1 Hz		
Maximum current	66 A		
Number of output phases	3		
Efficiency	93%		
Crest factor	3:1		
Emergency Power Off (EPO)	✓		
Input current Total Harmonic Distortion (THD)	5%		
Noise level	58 dB		
Surge protection	✓		
Audible alarm(s)	✓		
Audible alarm modes	Alarm when on battery, Low battery alarm, Overload alarm		
Auto-restart	✓		
Ports & interfaces		Design	
AC outlet types	Hard Wire 5-wire (3P + N + E)	Form factor *	Rackmount/Tower
Power plug	Hardwire	Rack capacity	7U
USB port	✓	Product colour *	Black
Serial interface	✓	Display type	LCD
		LED indicators	✓
		International Protection (IP) code	IP20
		Operational conditions	
		Operating temperature (T-T)	0 - 40 °C
		Storage temperature (T-T)	-15 - 45 °C
		Operating relative humidity (H-H)	0 - 95%
		Storage relative humidity (H-H)	0 - 95%
		Operating altitude	0 - 2011.68 m
		Non-operating altitude	0 - 15240 m
		Packaging content	
		Cables included	RS-232
		Weight & dimensions	
		Width	440 mm
		Depth	700 mm
		Height	306 mm
		Weight	142.5 kg

Ports & interfaces		Packaging data	
Serial interface type	RS-232	Package width	590 mm
SmartSlot	✓	Package depth	790 mm
<b>Battery</b>		Package height	535 mm
Battery technology	Sealed Lead Acid (VRLA)	Package weight	156.7 kg
		Logistics data	
		Harmonized System (HS) code	85078000

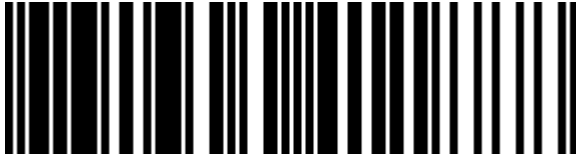

0731304411888



731304411888



8592978462314

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.