EZVIZ BC1C 2K+ Luoti (muoto) IP-turvakamera Ulkona 2560 x 1440 pikseliä Katto/seinä

Tuotemerkki : EZVIZ

Tuotteen nimi : BC1C 2K+

Tuotekoodi: CS-BC1C-A0-2C4WPBDL
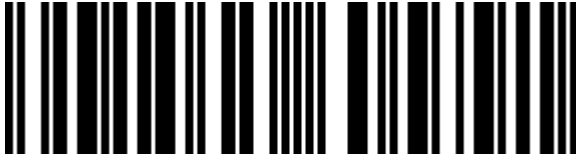
EZVIZ BC1C 2K+. Malli: IP-turvakamera, Tuettu sijoitus: Ulkona, Yhteysteknologia: Langaton. Kiinnitystyyppi: Katto/seinä, Tuotteen väri: musta, Harmaa, Kotelo: Luoti (muoto). Objektiivin kuvakulma, vaakasuora: 100°, Objektiivin kuvakulma, pystysuora: 52°, Objektiivin kuvakulma, kulmittain: 116°. Anturin tyyppi: CMOS, Optisen sensorin koko: 25,4 / 2,8 mm (1 / 2.8"). Kiinteä polttoväli: 2,8 mm

Performance

Type *	IP security camera
Placement supported *	Outdoor
Connectivity technology *	Wireless
Day/night mode	✔
Infrared (IR) cut-off filter	✔
Operating frequency	2400 - 2483.5 MHz
Certification	CE/FCC/WEEE/ROHS/REACH/UL

Design

Form factor *	Bullet
Mounting type *	Ceiling/wall
Product colour *	Black, Grey
Protection features	Dust resistant, Water resistant
International Protection (IP) code	IP66
Weatherproof	✔

Camera

Minimum illumination	0 lx
Lens viewing angle, horizontal	100°
Lens viewing angle, vertical	52°
Lens viewing angle, diagonal	116°
Adjustment shutter speed	Auto

Image sensor

Number of sensors	1
Optical sensor size	25.4 / 2.8 mm (1 / 2.8")
Progressive scan	✔
Sensor type *	CMOS

Lens system

Number of lenses *	1
Maximum aperture number	1
Fixed focal length	2.8 mm

Night vision

Night vision *	✔
Night vision distance	10 m
LED type	IR

Video

Maximum resolution *	2560 x 1440 pixels
Total megapixels *	4 MP

Network

Networking standards	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n
Wi-Fi *	✔
Wi-Fi standards	802.11b, 802.11g, Wi-Fi 4 (802.11n)
Wi-Fi data rate (max)	72 Mbit/s
Bluetooth *	✘

Storage

Built-in HDD *	✘
Flash memory	32768 MB

Ports & interfaces

DC-in jack	✔

Security

Password protection	✔
Video motion detection	✔
Security algorithms	64-bit WEP, 128-bit WEP, WPA, WPA-PSK, WPA2, WPA2-PSK
Intelligent Video Surveillance (IVS) system features	Human detection
Anti-flicker	✔
Heartbeat	✔
Digital watermark	✔

Power

Power source type *	Battery
Power consumption (max)	5 W
DC output voltage	5
DC output current	2 A
Battery capacity	10400 mAh

Operational conditions

Operating temperature (T-T)	-20 - 50 °C
Operating relative humidity (H-H)	0 - 95%

Weight & dimensions

Width	104.8 mm
Depth	62.8 mm
Height	62.8 mm
Weight	365 g

Video

Video formats supported	H.264, H.265
Video compression formats	H.264, H.265
Supported video modes	1440p
Video recording	✔
Frame rate	15 fps
Video streaming	✔
Noise reduction	✔
Noise reduction technology	3D noise reduction
Bit rate	2Mbps

Network

Ethernet LAN *	✘

Packaging data

Package width	186 mm
Package depth	103 mm
Package height	103 mm
Package weight	835 g

Packaging content

Number of cameras *	1
Cables included	USB
Mounting kit	✔
Mounting brackets included	✔
Screws included	✔
AC adapter included	✔
Quick start guide	✔

Technical details

Lens mount interface	M12

6941545605791