DELL

DELL P Series P2723QE LED display 68,6 cm (27") 3840 x 2160 pikseliä 4K Ultra HD LCD musta

Tuotemerkki : DELL   **Tuoteperhe:** P Series   **Tuotekoodi:** DELL-P2723QE

Tuotteen nimi : P2723QE

DELL P Series P2723QE. Näytön halkaisija: 68,6 cm (27"), Näytön erottelutarkkuus: 3840 x 2160 pikseliä, HD-tyyppi: 4K Ultra HD, Näytön teknologia: LCD, Vasteaika (tyypillinen): 5 ms, Vakiokuvasuhde: 16:9, Katselukulma, vaakasuora: 178°, Katselukulma, pystysuora: 178°. Sisäänrakennettu USB-keskus, USB-keskuksen versio: 3.2 Gen 1 (3.1 Gen 1). VESA-kiinnitys, Korkeudensäätö. Tuotteen väri: musta

Display

Display diagonal *	68.6 cm (27")
Display resolution *	3840 x 2160 pixels
HD type *	4K Ultra HD
Native aspect ratio *	16:9
Display technology *	LCD
Panel type *	IPS
Backlight type	LED
Touchscreen *	✗
Display brightness (typical)	350 cd/m²
Response time *	5 ms
Anti-glare screen	✔
Screen shape *	Flat
Supported video modes	480p, 576p, 720p, 2160p
Contrast ratio (typical) *	1000:1
Maximum refresh rate *	60 Hz
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours *	1.073 billion colours
Response time (fast)	8 ms
Pixel pitch	0.1554 x 0.1554 mm
Pixel density	163 ppi
Horizontal scan range	15 - 135 kHz
Vertical scan range	24 - 86 Hz
Viewable size, horizontal	59.7 cm
Viewable size, vertical	33.6 cm
Viewable size diagonal	68.5 cm
Display diagonal (metric)	68.47 cm
High Dynamic Range (HDR) supported	✗

Ergonomics

On Screen Display (OSD)	✔
Plug and Play	✔
LED indicators	✔

Power

Energy efficiency class (SDR) *	F
Energy efficiency class (HDR) *	Not available
Energy consumption (SDR) per 1000 hours *	26 kWh
Power consumption (typical) *	26 W
Power consumption (standby) *	0.2 W
Power consumption (max)	169 W
Power consumption (off)	0.2 W
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Input current	2.5 A
Power supply type	Internal
Energy efficiency scale	A to G
European Product Registry for Energy Labelling (EPREL) code	1054915

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-20 - 60 °C
Operating relative humidity (H-H)	10 - 80%
Storage relative humidity (H-H)	5 - 90%
Operating altitude	0 - 5000 m
Non-operating altitude	5000 - 12192 m

Weight & dimensions

Width (with stand)	611.6 mm

Display

Colour gamut standard	sRGB
Colour gamut	99%

Performance

NVIDIA G-SYNC *	✘
AMD FreeSync *	✘
Low Blue Light technology	✔

Multimedia

Built-in speaker(s) *	✘
Built-in camera *	✘

Design

Market positioning *	Business
Product colour *	Black
Front bezel colour	Black
Detachable stand	✔
Feet colour	Silver

Ports & interfaces

Built-in USB hub *	✔
USB hub version	3.2 Gen 1 (3.1 Gen 1)
USB upstream port type	USB Type-C
Number of USB Type-C upstream ports quantity	1
USB Type-A downstream ports quantity	4
HDMI *	✔
HDMI ports quantity	1
HDMI version	2.0
DisplayPorts quantity	1
DisplayPort version	1.4
Headphone out *	✘
HDCP	✔

Network

Wi-Fi	✘

Ergonomics

VESA mounting *	✔
Panel mounting interface	100 x 100 mm
Cable lock slot *	✔
Height adjustment *	✔
Adjustable height (max)	15 cm
Pivot	✔
Pivot angle	90 - 90°
Swivelling	✔
Swivel angle range	-45 - 45°
Tilt adjustment	✔
Tilt angle range	-5 - 21°

Weight & dimensions

Depth (with stand)	185 mm
Height (with stand)	535.2 mm
Weight (with stand)	6.87 kg
Width (without stand)	611.6 mm
Depth (without stand)	52.1 mm
Height (without stand)	360.7 mm
Weight (without stand)	5.05 kg
Bezel width (side)	7.4 mm
Bezel width (top)	7.4 mm
Bezel width (bottom)	1.77 cm

Packaging data

Package weight	9.68 kg

Packaging content

Stand included	✔
Cables included	AC, DisplayPort, USB Type-A to USB Type-C, USB Type-C to USB Type-C
Quick start guide	✔
DisplayPort cable length	1.8 m

Sustainability

Sustainability certificates	ENERGY STAR, TCO
Doesn't contain	PVC/BFR

Carbon footprint

Total carbon footprint (kg of CO_2e)	727
Total carbon emissions, standard deviation (kg of CO_2e)	172
Carbon emissions, manufacturing (kg of CO_2e)	381
Carbon emissions, logistics (kg of CO_2e)	87
Carbon emissions, energy usage (kg of CO_2e)	254
Carbon emissions, end-of-life (kg of CO_2e)	5
Total carbon emissions, w/o use phase (kg of CO_2e)	473
PAIA version	1.3.0

Other features

Heavy metals free	Hg (mercury)
Compliance certificates	RoHS
Ethernet LAN (RJ-45) ports	1

Logistics data

Harmonized System (HS) code	85285210

5397184656808

5704174839477

5704174839484

5704174839460
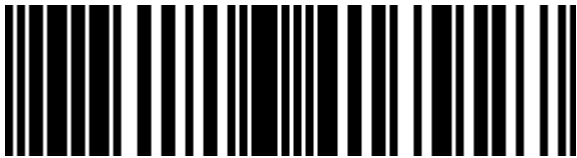
0884116417927

884116417927