

Fujitsu PRIMERGY RX2540 M6 palvelin Teline (2U) Intel® Xeon Silver 4314 2,4 GHz 32 GB DDR4-SDRAM



Tuotemerkki : Fujitsu


Tuoteperhe: PRIMERGY

Tuotekoodi:
VFY:R2546SC120IN

Tuotteen nimi : RX2540 M6

Fujitsu PRIMERGY RX2540 M6. Suoritinperhe: Intel® Xeon Silver, Prosessorin taajuus: 2,4 GHz, Prosessorimalli: 4314. Sisäinen muisti: 32 GB, Sisäisen muistin tyyppi: DDR4-SDRAM. HDD-käyttöliittymä: SATA III, Serial Attached SCSI (SAS). Ethernet LAN, Kaapelitekniikka: 10/100/1000Base-T(X). Optisen aseman tyyppi: DVD±RW. Vikasietoisen virtalähteen tuki (RPS). Alustatyyppi: Teline (2U)

Processor		Expansion slots	
Processor manufacturer *	Intel	PCI Express x8 slots	3
Processor family *	Intel Xeon Silver	PCI Express x16 slots	4
Processor model *	4314	Design	
Processor frequency *	2.4 GHz	Chassis type *	Rack (2U)
Processor boost frequency	3.4 GHz	Product colour	Black, Stainless steel
Processor cores	16	Rack mounting	✓
Processor cache	24 MB	Redundant fans support	✓
Motherboard chipset	Intel C621A	Bezel	✓
Memory		Performance	
Internal memory *	32 GB	BIOS type	UEFI
Internal memory type *	DDR4-SDRAM	Trusted Platform Module (TPM)	✓
Memory slots	32x DIMM	Trusted Platform Module (TPM) version	2.0
ECC	✓	Power	
Memory clock speed	3200 MHz	Redundant power supply (RPS) support *	✓
Maximum internal memory *	12 TB	Number of redundant power supplies supported	2
Storage		Power supply input voltage	100-240 V
HDD interface	SATA III, Serial Attached SCSI (SAS)	Power supply input frequency	50/60 Hz
Number of HDDs supported	16	Operational conditions	
Supported HDD sizes	2.5"	Operating temperature (T-T)	0 - 35 °C
RAID support *	✓	Operating relative humidity (H-H)	10 - 85%
Hot-Plug support	✓	Weight & dimensions	
Optical drive type *	DVD±RW	Width	482.5 mm
Network		Depth	800 mm
Ethernet LAN	✓	Height	86.9 mm
Cabling technology	10/100/1000Base-T(X)	Ports & interfaces	
Ports & interfaces		Ethernet LAN (RJ-45) ports *	5
Ethernet LAN (RJ-45) ports *	5	USB 2.0 ports quantity	6
USB 2.0 ports quantity	6	VGA (D-Sub) ports quantity	2
VGA (D-Sub) ports quantity	2		

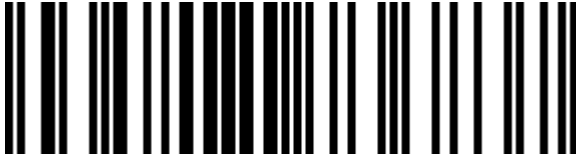

4065221736837

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 24-FEB-2025. Prints or copies of Information are only valid on the printed Publication date