

Philips Signage Solutions 49BDL2105X/00 infonäyttö 123,2 cm (48.5") IPS 500 cd/m² Full HD musta 24/7

Tuotemerkki : Philips


Tuoteperhe: Signage Solutions **Tuotekoodi:** 49BDL2105X/00

Tuotteen nimi :

49BDL2105X/00

Philips Signage Solutions 49BDL2105X/00. Näytön halkaisija: 123,2 cm (48.5"), Näytön teknologia: IPS, Näytön erottelutarkkuus: 1920 x 1080 pikseliä, Näytön kirkkaus: 500 cd/m², HD-tyyppi: Full HD. Toiminta-aika (tunteja/päiviä): 24/7. Tuotteen väri: musta


Display		Audio	
LED backlighting type	Direct-LED	Built-in speaker(s) *	✓
Display diagonal *	123.2 cm (48.5")	Number of built-in speakers	2
Display technology *	IPS	RMS rated power	20 W
Display resolution *	1920 x 1080 pixels	Design	
Display brightness *	500 cd/m ²	Placement supported *	Indoor
HD type *	Full HD	Orientation	Horizontal/Vertical
Native aspect ratio	16:9	Product colour *	Black
Response time	8 ms	VESA mounting *	✓
Contrast ratio (typical)	1100:1	Panel mounting interface	400 x 400 mm
Contrast ratio (dynamic)	500000:1	Mounting type	Wall
Viewing angle, horizontal	178°	Performance	
Viewing angle, vertical	178°	On Screen Display (OSD) languages	Arabic, Simplified Chinese, Traditional Chinese, German, English, Spanish, French, Italian, Japanese, Polish, Russian, Turkish
Display number of colours	1.07 billion colours	Operating hours (hours/days)	24/7
Pixel pitch	0.55926 x 0.55926 mm	Mean time between failures (MTBF)	50000 h
Display diagonal (metric)	123 cm	Power	
Transparency	3%	Power consumption (typical) *	100 W
Ports & interfaces		Power consumption (standby) *	0.5 W
HDMI ports quantity *	2	Weight & dimensions	
HDMI version	2.0	Display width	1077.6 mm
HDMI input ports quantity	2	Display depth	93.1 mm
DVI port *	✓	Display height	607.8 mm
DVI-D ports quantity	1	Display weight	21.7 kg
VGA (D-Sub) input ports	1	Packaging content	
DisplayPorts quantity *	2	Remote control included	✓
DisplayPorts in	1	Batteries included	✓
DisplayPorts out	1	Cables included	DisplayPort, AC, IR sensor, LAN (RJ-45)
USB port *	✓	Operational conditions	
USB ports quantity	1	Operating temperature (T-T)	0 - 40 °C
USB version	2.0	Operating relative humidity (H-H)	20 - 80%
USB connector type	USB Type-A	Storage temperature (T-T)	-20 - 60 °C
Ethernet LAN *	✓	Storage relative humidity (H-H)	5 - 95%
Ethernet LAN (RJ-45) ports	2	Certificates	
Audio (L/R) in	1	Certification	CE FCC Class A Restriction of Hazardous Substances (ROHS) CB ETL BSMI
Audio (L/R) out	1		
Remote (IR) input	1		
Remote (IR) output	1		
OPS module slot	✓		

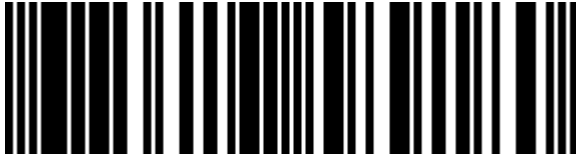

0685417589180



685417589180

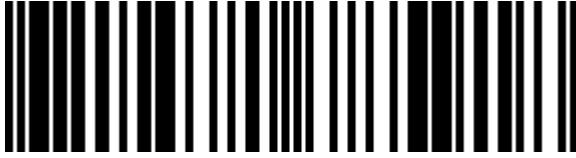

8712581785918

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.