

Philips Signage Solutions X-Line Videowall LED Sisätila




Tuotemerkki : Philips

Tuoteperhe: Signage Solutions **Tuotekoodi**: 55BDL3207X/00

Tuotteen nimi : X-Line Videowall

Philips Signage Solutions X-Line Videowall. Näytön halkaisija: 139,7 cm (55"), Näytön erottelutarkkuus: 1920 x 1080 pikseliä, Näytön teknologia: LED, Näytön kirkkaus: 700 cd/m², HD-tyyppi: Full HD. Tuotteen väri: musta

Display		Ports & interfaces	
Display technology *	LED	DisplayPorts in	1
Display diagonal	139.7 cm (55")	DisplayPorts out	1
Display resolution	1920 x 1080 pixels	DisplayPort version	1.3
HD type	Full HD	Wi-Fi	✗
LED backlighting type	Direct-LED	Ethernet LAN	✓
Pixel pitch *	0.63 x 0.63 mm	Ethernet LAN (RJ-45) ports	2
Display brightness *	700 cd/m ²	USB port	✓
Display number of colours	1.07 billion colours	USB ports quantity	1
Contrast ratio (typical)	1100:1	USB version	2.0
Contrast ratio (dynamic)	500000:1		
Native refresh rate	60 Hz	Power	
Viewing angle, horizontal	178°	Power consumption (typical) *	170 W
Viewing angle, vertical	178°	Power consumption (max)	340 W
Haze rate	28%	Power consumption (standby)	0.5 W
Display diagonal (metric)	138.7 cm	Operational conditions	
Mean time between failures (MTBF)	50000 h	Operating temperature (T-T)	0 - 40 °C
Design		Storage temperature (T-T)	-20 - 60 °C
Placement supported *	Indoor	Operating relative humidity (H-H)	20 - 80%
Orientation *	Horizontal/Vertical	Storage relative humidity (H-H)	5 - 95%
Wall mountable	✓	Technical details	
VESA mounting	✓	Warranty period	3 year(s)
Panel mounting interface	100 x 100,400 x 400 mm	Compliance certificates	CE, RoHS
Product colour	Black	Sustainability	
Purpose	Universal	Sustainability compliance	✓
Ports & interfaces		Certification	FCC, Class A CB ETL BSMI PSE
HDMI ports quantity	2	Weight & dimensions	
HDMI input ports quantity	2	Width	1213.4 mm
HDMI version	2.0	Depth	98.2 mm
DVI port	✓	Height	684.2 mm
DVI-D ports quantity	1	Weight	26.2 kg
VGA (D-Sub) input ports	1	Packaging data	
DisplayPorts quantity	2	Cables included	AC, DisplayPort, LAN (RJ-45)
		Remote control included	✓

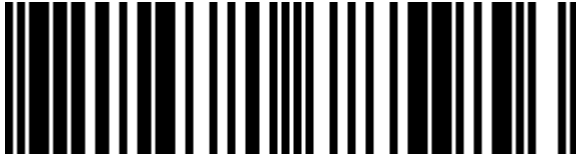

8712581785956

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 24-FEB-2025. Prints or copies of Information are only valid on the printed Publication date