



## APC SRTL5KRM2UI UPS-virtalähde Taajuuden kaksoismuunnos (verkossa) 5 kVA 5000 W 10 AC-pistorasia(a)

Tuotemerkki : APC

Tuotekoodi: SRTL5KRM2UI

Tuotteen nimi : SRTL5KRM2UI




APC SRTL5KRM2UI. UPS topologia: Taajuuden kaksoismuunnos (verkossa), Kokonaislähtöteho (VA): 5 kVA, Lähtöteho: 5000 W. Pistorasian tyypit: C13 liitin, C19 liitin, Virtapistoke: Hardwire, Ulostulojen määrä: 10 AC-pistorasia(a). Akkuteknologia: Litiumioni (Li-Ion), Akun jännite: 180 V, Tyypillinen varmuuskopioaika täydellä kuormituksella: 5,25 min. Kotelo: Telineasennettava, Tuotteen väri: musta, Telineen kapasiteetti: 2U. Vaatimustenmukaisuustodistukset: CE, RoHS



Features		Battery	
UPS topology *	Double-conversion (Online)	Automatic battery test	✓
Output power capacity *	5 kVA	Cold start	✓
Output power *	5000 W		
Waveform *	Sine		
Input operation voltage (min) *	180 V		
Input operation voltage (max) *	275 V		
Input frequency *	40/70 Hz		
Output operation voltage (max)	220 V		
Output frequency	50/60 Hz		
Surge energy rating	1260 J		
Heat dissipation	931 BTU/h		
Power factor	1		
Output power factor	1		
Crest factor	3:1		
Emergency Power Off (EPO)	✓		
Output voltage Total Harmonic Distortion (THD)	2%		
Noise level	55 dB		
Auto-restart	✓		
Ports & interfaces		Design	
AC outlet types	C13 coupler, C19 coupler	Form factor *	Rackmount
Power plug	Hardwire	Rack capacity	2U
AC outlets quantity	10 AC outlet(s)	Product colour *	Black
USB port	✓	Display type	LCD
Serial interface	✓	International Protection (IP) code	IP20
Serial ports quantity	1		
Battery		Operational conditions	
Battery technology	Lithium-Ion (Li-Ion)	Operating temperature (T-T)	0 - 40 °C
		Storage temperature (T-T)	-15 - 45 °C
		Operating relative humidity (H-H)	0 - 95%
		Storage relative humidity (H-H)	0 - 95%
		Operating altitude	0 - 3048 m
		Non-operating altitude	0 - 15240 m
		Certificates	
		Compliance certificates	CE, RoHS
		Sustainability	
		Sustainability compliance	✓
		Sustainability certificates	Green Premium
		Weight & dimensions	
		Width	432 mm
		Depth	701 mm
		Height	86 mm
		Weight	29.2 kg

<b>Battery</b>		<b>Packaging data</b>	
Battery voltage	180 V	Package width	585 mm
Typical backup time at full load	5.25 min	Package depth	984 mm
Battery life (max)	10 year(s)	Package height	392 mm
Battery recharge time	1.5 h	Package weight	38.5 kg
<b>Other features</b>			
Nominal output voltage		230 V	
Nominal input voltage		230 V	

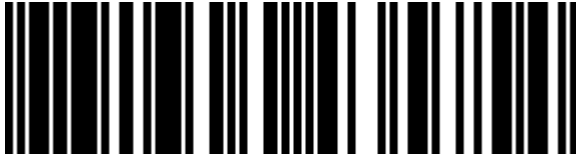

0731304435754



731304435754

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.