

GCS922MDPKIT

## 2-Port USB DVI Cable KVM with MiniDisplayPort Adapters Bundle



### DVI and Mini DisplayPort Mix & Match Solution

IOGEAR's DVI and Mini DisplayPort KVM Solution simplifies the method of sharing two computers using one DVI monitor, keyboard and mouse. This bundle is perfect for a home office or small / medium size business, as it offers the flexibility of choosing between DVI and/or Mini DisplayPort connections. Take advantage of your existing computers, and use the included Mini DisplayPort adapters to view your content on a DVI projector, monitor, or display. Streamline and develop efficient workstations to eliminate multiple desktop setups.


### Straight Forward Connectivity

Switch and control any of the two connected computers easily via remote push button. This 2-Port DVI - Mini DisplayPort switch does not require external power and supports USB hot-plugging, making it easy to add or remove USB computers connected to the KVM. Expand your USB peripheral sharing by using the USB mouse port. IOGEAR's Mini DisplayPort to DVI video adapter supports the DisplayPort 1.1a standard, allowing the ability to pass high resolution video resolutions of up to 1920x1200 to the connected DVI display or projector, allowing the content being shown to maintain its visual fidelity.


- Connect and control two DVI-D or Mini DisplayPort USB 2.0 interface computers with a single keyboard and mouse
- USB mouse port can be used for USB peripheral sharing, such as external storage drive
- Computer Selection via push-button Remote Port Selector
- Video resolution – up to 1920 x 1200 @60Hz
- Supports USB hot-plugging
- Power supply not required
- Mini DisplayPort to DVI Adapters:
  - Converts your Mini DisplayPort to DVI so you can connect to your DVI projector, TV or monitor.
  - Works with Apple® iMac® or MacBook®
  - Compliant with Mini DisplayPort Specification 1.1a for both 1.62 Gbps and 2.7 Gbps
  - Support full Mini DisplayPort link tracking
  - Supported resolutions:
    - Full HD 1080p
    - 1920x1200
  - Compliant with DVI 1.0 up to 1.65Gbps
  - Support interrupt request output for expansion function
  - Support Deep Sleep Mode (suspend mode)



**Solution 1**

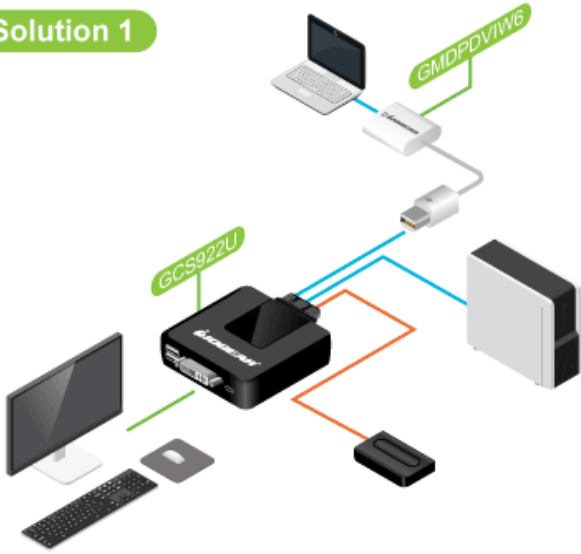

**Solution 2**

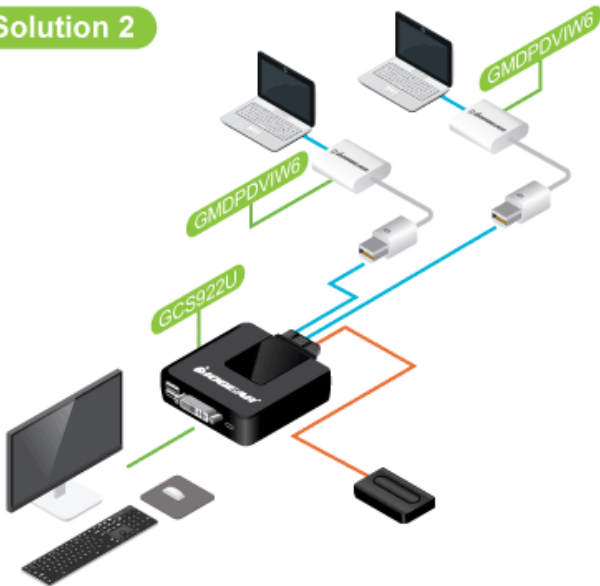

**Requirements**

**Package Contents**

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• <b>Console:</b></li> <li>• 1 DVI display</li> <li>• 1 set of USB keyboard and mouse</li> <li>•</li> <li>• <b>Computers:</b></li> <li>• 1 DVI-D Port or Mini DisplayPort</li> <li>• 1 USB Ports</li> <li>•</li> <li>• <b>Operating Systems:</b></li> <li>• Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10</li> <li>• Mac OS 9 to 10.x</li> <li>• Oracle® Solaris</li> <li>• Linux®, Unix and other USB supported systems*</li> </ul> | <ul style="list-style-type: none"> <li>• 1 x GCS922U</li> <li>• 2 x Mini DisplayPort to DVI Adapters</li> <li>• 1 x Quick Start Guide</li> <li>• 1 x Warranty</li> </ul> |
|---|--|

\*Additional drivers and support may be needed

## Specifications

Function	GCS922MDPKIT	Dimensions	GCS922MDPKIT
<b>Computer Connections</b>		<b>POP Information</b>	
Direct	2	10" Peg Hook	5
<b>Console Connectors</b>		6" Peg Hook	3
Monitor	1 x DVI-D Female	<b>Unit Dimensions</b>	
Keyboard	1 x USB Type A Female	Height	1.06" (2.69cm)
Mouse	1 x USB Type A Female	Depth	4.06" (10.3cm)
<b>CPU Connectors</b>		Length	3.44" (8.74cm)
Monitor	2 x DVI-D Male; 2 x Mini DisplayPort Male (adapters)	<b>Unit Package Dimensions</b>	
Keyboard & Mouse	2 x USB Type A Male	Width	6.13" (15.6cm)
<b>LEDs</b>		Height	8.81" (22.4cm)
On Line	2 x Green	Depth	2.25" (5.72cm)
<b>Video Resolution</b>		<b>Master Carton</b>	
1900x1200 @60Hz		Width	6.75" (17.1cm)
<b>Environment</b>		Height	15" (38.1cm)
Storage Temperature	-20-60°C	Depth	8" (20.3cm)
Operation Temperature	0-50°C	Master Carton Qty.	6
Humidity	0-80%; Non-condensing	<b>Weight</b>	
<b>Port Selection</b>		Master Carton Wt.	7.2lb (3.27kg)
Remote Switch		Unit Pack Wt.	1.1lb (0.5kg)
<b>Cable Length</b>		Unit Wt. w/accessories	0.85lb (0.39kg)
2 x 4ft. ea KVM cables; 1 x 6ft. Remote Switch		Unit Wt.	0.75lb (0.34kg)
<b>Cable Type</b>			
Bonded USB KVM			
<b>Housing</b>			
Case	Plastic		