



TP-Link TL-SG1016PE Hallittu L2 Gigabit Ethernet (10/100/1000) Power over Ethernet -tuki 1U musta

Tuotemerkki : TP-Link

Tuotekoodi: TL-SG1016PE V2

Tuotteen nimi : TL-SG1016PE




TP-Link TL-SG1016PE. Kytkin tyyppi: Hallittu, Kytkinkerros: L2. Peruskytkentä RJ-45 Ethernet-porttien tyyppi: Gigabit Ethernet (10/100/1000), Basic kytkentä RJ-45 Ethernet-porttien määrä: 16. MAC-osoitetaulukko: 8000 entries, Kytkentäkapasiteetti: 32 Gbit/s. Verkkostandardit: IEEE 802.1Q, IEEE 802.1p, IEEE 802.3ab, IEEE 802.3i, IEEE 802.3u, IEEE 802.3x. Virtaliitin: AC-in-liitin. Power over Ethernet -tuki. Telineasennus, Kotelo: 1U

Management features		Design	
Switch type *	Managed	LED indicators	✓
Switch layer	L2	Number of fans	1 fan(s)
Quality of Service (QoS) support	✓	Performance	
Web-based management	✓	Compatible operating systems	Windows
Ports & interfaces		Maximum cable length	100 m
Basic switching RJ-45 Ethernet ports quantity *	16	Power	
Basic switching RJ-45 Ethernet ports type *	Gigabit Ethernet (10/100/1000)	Power source *	AC/PoE
Gigabit Ethernet (copper) ports quantity	16	Power supply included *	✓
Power connector	AC-in jack	AC input voltage	100 - 240 V
Network		AC input frequency	50/60 Hz
Networking standards *	IEEE 802.1Q, IEEE 802.1p, IEEE 802.3ab, IEEE 802.3i, IEEE 802.3u, IEEE 802.3x	Power consumption (max)	124.4 W
10G support *	✗	Power over Ethernet (PoE)	
Copper ethernet cabling technology	10BASE-T, 100BASE-TX, 1000BASE-T	Power over Ethernet (PoE) *	✓
Cable types supported	Cat3, Cat4, Cat5, Cat5e, Cat6	Power over Ethernet plus (PoE+) ports quantity	8
Port mirroring	✓	Power over Ethernet (PoE) power per port	30 W
Flow control support	✓	Total Power over Ethernet (PoE) budget	110 W
Link aggregation	✓	Operational conditions	
Broadcast storm control	✓	Operating temperature (T-T)	0 - 40 °C
Auto MDI/MDI-X	✓	Storage temperature (T-T)	-40 - 70 °C
Auto-negotiation	✓	Operating relative humidity (H-H)	10 - 90%
VLAN support	✓	Storage relative humidity (H-H)	5 - 90%
Virtual LAN features	Tagged VLAN, Port-based VLAN	Weight & dimensions	
Number of VLANs	4000	Width	294 mm
Data transmission		Depth	180 mm
Switching capacity *	32 Gbit/s	Height	44 mm
Forwarding rate	23.8 Mpps	Packaging content	
MAC address table *	8000 entries	Cables included	AC
		User guide	✓

Data transmission		Packaging content	
Store-and-forward	✓	Rack mount kit	✓
Number of queues	4	Packaging data	
Jumbo frames support	✓	Package type	Box
Jumbo frames	10000	Resource CD	✓
Packet buffer memory	4.1 MB	Package width	250 mm
Security		Package depth	400 mm
IGMP snooping	✓	Package height	80 mm
Design		Package weight	2.28 kg
Rack mounting *	✓	Sustainability	
Stackable *	✗	Sustainability compliance	✓
Form factor	1U	Certificates	
Product colour	Black	Compliance certificates	CE, Federal Communications Commission (FCC), RoHS
Housing material	Metal		



6935364098865

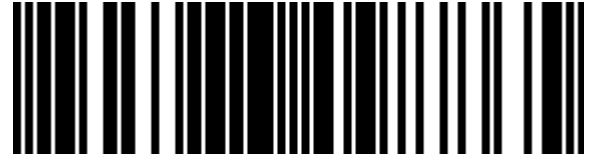

0845973098865



845973098865



6935364082925

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.