

# Connection Boxes

## 8-port RS-232 connection boxes

### Features and Benefits

- Connection boxes with 8 RS-232 serial ports




### Introduction



Moxa's 8-port RS-232 connection boxes provide 8 common connection ports, including DB9, 8-pin RJ45, and DB25, for connecting your serial devices to a serial board.

### Pin Assignments


#### OPT8-M9




#### OPT8-M9+

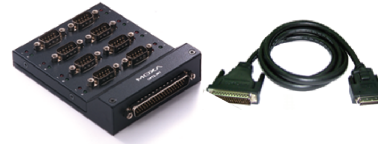


#### OPT8-RJ45




#### OPT8-RJ45+




#### OPT8A/S




#### OPT8A/S+



## OPT8B



## OPT8B+



## Specifications

### Connector

Board-side Connector	OPT8-M9/RJ45, OPT 8A/S/B: DB62 (male) x 1 OPT8-M9+/RJ45+, OPT 8A+/S+/B+: VHDCI 68 x 1
Device-side Connector	OPT8-M9/M9+: DB9 (male) x 8 OPT8-RJ45/RJ45+: 8-pin RJ45 x 8 OPT 8A/A+: DB25 (female) x 8 OPT 8S/S+: DB25 (female) x 8 OPT 8B/B+: DB25 (male) x 8
Connection Cable	OPT8-M9: DB62 (male) to DB62 (female) 1.5 m connection cable for connecting to the serial board OPT8-M9+: VHDCI 68 to DB62 (female) 1.5 m connection cable for connecting to the serial board OPT 8A: DB62 (male) to DB62 (male) 1.5 m connection cable for connecting to the serial board OPT 8A+: VHDCI 68 to DB62 (male) 1.5 m connection cable for connecting to the serial board OPT 8S: DB62 (male) to DB62 (male) 1.5 m connection cable for connecting to the serial board OPT 8S+: VHDCI 68 to DB62 (male) 1.5 m connection cable for connecting to the serial board OPT 8B: DB62 (male) to DB62 (male) 1.5 m connection cable for connecting to the serial board OPT 8B+: VHDCI 68 to DB62 (male) 1.5 m connection cable for connecting to the serial board

### LED Interface

LED Indicators	OPT8-M9, OPT 8A/S/B: TxD, RxD indicators for each device-side port OPT8-M9+, OPT 8A+/S+/B+: TxD, RxD indicators for each device-side port
----------------	--

### Serial Interface

Baudrate	OPT 8A/S/B/A+/S+/B+: 50 bps to 921.6 kbps
----------	---

### Physical Characteristics

Dimensions	OPT8-M9/M9+: 90 x 111 x 27.5 mm (3.54 x 4.37 x 1.08 in) OPT8-RJ45/RJ45+: 152.8 x 32.8 x 32 mm (6.02 x 1.29 x 1.26 in) OPT 8A/B/S/A+/B+/S+: 247 x 108 x 35 mm (9.72 x 4.25 x 1.38 in)
Surge Protection	OPT 8S: 25 kV ESD, 2 kV EFT surge protection

### Warranty

Warranty Period	1 year
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>

### Package Contents

Device	1 x connection box
--------	--------------------

## Ordering Information

Model Name	Board-side Connector	Device-side Connector	Dimensions	Connection Cable
OPT8-M9	DB62 (male) x 1	DB9 (male) x 8	90 x 111 x 27.5 mm	DB62 (male) to DB62 (female), 1.5 m
OPT8-M9+	VHDCI 68 x 1	DB9 (male) x 8	90 x 111 x 27.5 mm	VHDCI 68 to DB62 (female), 1.5 m
OPT8-RJ45	DB62 (male) x 1	8-pin RJ45 x 8	152.8 x 32.8 x 32 mm	–
OPT8-RJ45+	VHDCI 68 x 1	8-pin RJ45 x 8	152.8 x 32.8 x 32 mm	–
OPT 8A	DB62 (male) x 1	DB25 (female) x 8	247 x 108 x 35 mm	DB62 (male) to DB62 (male), 1.5 m
OPT 8A+	VHDCI 68 x 1	DB25 (female) x 8	247 x 108 x 35 mm	VHDCI 68 to DB62 (male), 1.5 m
OPT 8S	DB62 (male) x 1	DB25 (female) x 8	247 x 108 x 35 mm	DB62 (male) to DB62 (male), 1.5 m
OPT 8S+	VHDCI 68 x 1	DB25 (female) x 8	247 x 108 x 35 mm	VHDCI 68 to DB62 (male), 1.5 m
OPT 8B	DB62 (male) x 1	DB25 (male) x 8	247 x 108 x 35 mm	DB62 (male) to DB62 (male), 1.5 m
OPT 8B+	VHDCI 68 x 1	DB25 (male) x 8	247 x 108 x 35 mm	VHDCI 68 to DB62 (male), 1.5 m

© Moxa Inc. All rights reserved. Updated Dec 20, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.