



Lindy 15m USB 3.0 Active Extension Slim

Brand : Lindy

Product code: 43322

Product name : 15m USB 3.0 Active Extension Slim

15m USB 3.0 Active Extension Slim

[Lindy 15m USB 3.0 Active Extension Slim:](#)

The Lindy USB 3.0 Active Extension Cable Slim uses built-in active electronics to extend the cable length of a USB 3.0 device by an additional 15m whilst continuing to support data transfer rates of up to 5Gbps. With its USB A male and USB A female connector it allows Type A devices such as storage devices, webcams and other Type A devices to be connected at longer distances to PCs, laptops and tablets, while also ensuring flexible positioning. Up to 2 extension cables can be chained together to achieve a distance of 30m.

The Lindy USB 3.0 Active Extension Cable is compatible with all USB Type A equipped computers. The cable's unique and slim design allows installation in narrow surroundings - an advantage over other active USB leads which use bulky connectors.


The USB active extension cable also features a DC socket for connecting an external power supply (not included) when using USB peripherals which have higher power requirements.



| Features | | Weight & dimensions | |
|----------------------------|---|-----------------------------|-----------------------------|
| USB version * | USB 3.2 Gen 1 (3.1 Gen 1) | Cable length * | 15 m |
| Connector 1 * | USB A | Cable diameter | 7 mm |
| Connector 2 * | USB A | Weight | 980 g |
| Connector 1 gender * | Male | Packaging data | |
| Connector 2 gender * | Female | Package type | Box |
| Connector 1 form factor | Straight | Package width | 200 mm |
| Connector 2 form factor | Straight | Package depth | 77 mm |
| AWG wire size | 22/28 | Package height | 200 mm |
| Connector contacts plating | Nickel/Gold | Package weight | 1 kg |
| Magnetically shielded | ✓ | Packaging content | |
| Cable jacket material | Acrylonitrile butadiene styrene (ABS), Polyvinyl chloride (PVC) | Quantity per pack * | 1 pc(s) |
| Maximum data transfer rate | 5000 Mbit/s | Certificates | |
| Maximum data transfer rate | 5 Gbit/s | Certification | CE, FCC, RoHS & REACH, CP65 |
| Product colour * | Black | Logistics data | |
| Plug and Play | ✓ | Harmonized System (HS) code | 84733080 |



4002888423328

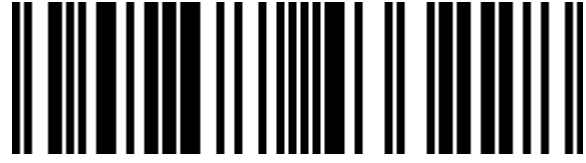

4002888433228

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.