



Lindy 3m Cat.6A S/FTP LSZH Network Cable, Grey

Brand : Lindy


Product code: 47135

Product name : 3m Cat.6A S/FTP LSZH Network Cable, Grey

3m Cat.6A S/FTP LSZH Network Cable, Grey

[Lindy 3m Cat.6A S/FTP LSZH Network Cable, Grey:](#)

Cat.6A S/FTP network cable with support for bandwidth up to 500MHz and features a snagless design with gold plated contacts for ethernet standards up to 10 GBase-T. Cat.6A cable, shielded with braid as overall shield and foil shield for the individual wire pairs (S/FTP). Cat.6A cables meet the requirements of 10 Gigabit Ethernet (10GBaseT) with an operating frequency of up to 500MHz. These cables are manufactured and tested according to the ISO/IEC 11801 specification. The cables are packaged individually in a polybag. The gold-plated contacts ensure reliable, corrosion-free connections over extensive periods of time. A robust snagless strain relief design prevents damage to the connector latch during installation and removal. The halogen-free sheath material of the LSZH cable makes the product suitable for use in public spaces with its low smoke emission and elimination of toxic halogen emissions.

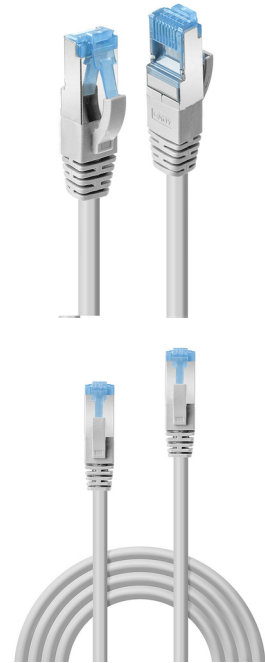

| Features | | Features | |
|----------------------------|-------------------------------|--------------------------------|--|
| Product colour * | Grey | Data transfer rate | 1000 Mbit/s |
| Cable length * | 3 m | Frequency | 500 MHz |
| Cable standard * | Cat6a | Bend radius (min) | 7.2 cm |
| Cable shielding * | S/FTP (S-STP) | Nominal attenuation | 49.3dB/100m @ 500MHz |
| Connector 1 * | RJ-45 | Operational conditions | |
| Connector 2 * | RJ-45 | Operating temperature (T-T) | -10 - 60 °C |
| Connector 1 gender * | Male | Storage temperature (T-T) | -20 - 75 °C |
| Connector 2 gender * | Male | Certificates | |
| Connector contacts plating | Gold | Certification | RoHS, REACH, UL, California Proposition 65 |
| Connector shielding | ✓ | Weight & dimensions | |
| Connector shield material | Aluminium | Outer diameter | 6 mm |
| Jacket material | Low smoke zero halogen (LSZH) | Packaging content | |
| Cable shape | Round | Quantity per pack | 1 pc(s) |
| Conductor material | Copper | Packaging data | |
| Cabling technology | 10/100/1000Base-T(X) | Package type | Polybag |
| AWG wire size | 27 | Logistics data | |
| | | Harmonized System (HS) code | 84733080 |



4002888471350

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.