

SilverNet MICRO 95 Network bridge 95 Mbit/s Black, White

Brand : SilverNet

Product code: SIL MICRO 95

Product name : MICRO 95

- Point-to-Point Outdoor Wireless Bridge Up to 2KM
- Point-to-MultiPoint Client
- Integrated 14dBi Antenna
- Designed for Outdoor applications
- SNMP
- AES Encryption up to 256bit
- MIMO with spatial multiplexing
- DFS (Dynamic Frequency Selection)
- TPC (Transmit Power Control)
- PoE 802.3af


95Mbps, MIMO, 5.1-5.8 GHz, 26 dBm, 14 dBi, RJ-45, PoE, 179x120x45mm

SilverNet MICRO 95. Maximum data transfer rate: 95 Mbit/s, Maximum transfer distance: 2000 m, Supported data transfer rates: 95Mbps. Antenna design: Internal, Antenna gain level (max): 14 dBi, Pan/tilt-axis range: 180°. Wi-Fi band: Single-band (5 GHz), Top Wi-Fi standard: Wi-Fi 5 (802.11ac), WLAN data transfer rate (max): 1300 Mbit/s. Ethernet LAN interface type: Gigabit Ethernet, Ethernet LAN data rates: 10,100,1000 Mbit/s, Networking standards: IEEE 802.11a, IEEE 802.11ac, IEEE 802.11i, IEEE 802.11n, IEEE 802.1Q, IEEE 802.1x, IEEE 802.3af. Connectivity technology: Wired & Wireless



Data transmission		Features	
Maximum data transfer rate *	95 Mbit/s	International Protection (IP) code	IP66
Maximum transfer distance	2000 m	Surge protection	✓
Supported data transfer rates	95Mbps	Quality of Service (QoS) support	✓
Antenna		Network Time Protocol (NTP) client	✓
Antenna design	Internal	Mean time between failures (MTBF)	60000 h
Antenna gain level (max)	14 dBi	System requirements	
Pan/tilt-axis range	180°	Minimum system requirements	Internet Explorer, Google Chrome, Mozilla Firefox
Antennas quantity	1	Compatible operating systems	Microsoft Windows, Mac OS, Linux Distributions
Wireless LAN features		Power	
Wi-Fi	✓	Power source type	DC, PoE
Wi-Fi band	Single-band (5 GHz)	AC input voltage	100-240 V
Top Wi-Fi standard	Wi-Fi 5 (802.11ac)	Power supply	15.4 W
WLAN data transfer rate (max)	1300 Mbit/s	DC input voltage	24-48/48-56 V
Frequency band	5.1 - 5.8 GHz	Power consumption (typical)	6 W
Transmission gain	0 - 14 dB	Power consumption (max)	16 W
Signal strength	-40 dBm	Power over Ethernet (PoE)	✓
Channels quantity	25 channels	Power over Ethernet (PoE) voltage	48 V
Modulation	16-QAM, 64-QAM, 256-QAM, BPSK, QPSK	Power plug type	Type G
Receiver sensitivity	-82dBm@54Mbps, -74dBm@300Mbps, -68dBm@1.3Gbps	Operational conditions	
Output power (dBm)	26	Operating temperature (T-T)	-20 - 70 °C
Indoor range	2000m	Operating temperature (T-T)	-4 - 158 °F
Outdoor range	2000m	Operating relative humidity (H-H)	0 - 95%
Network		Storage temperature (T-T)	-40 - 90 °C
Ethernet LAN	✓	Storage relative humidity (H-H)	0 - 95%
Ethernet LAN interface type	Gigabit Ethernet		

Network		Certificates	
Ethernet LAN data rates	10,100,1000 Mbit/s	Certification	CE, FCC
Networking standards	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11i, IEEE 802.11n, IEEE 802.1Q, IEEE 802.1x, IEEE 802.3af	Weight & dimensions	
Cabling technology	10/100/1000Base-T(X)	Antenna diameter	20.5 cm
Full duplex	✓	Width	179 mm
Auto MDI/MDI-X	✓	Depth	120 mm
Static IP	✓	Height	45 mm
Dynamic IP	✓	Weight	500 g
Ports & interfaces		Packaging content	
Connectivity technology	Wired & Wireless	PoE+ Injector(s)	✓
Ethernet LAN (RJ-45) ports	1	Mounting bracket(s) included	✓
Security		Power supply included	✓
Security algorithms	256-bit AES, 802.1x RADIUS, SNMP, SNMPv2, SSH	Antenna included	✓
MAC address filtering	✓	Quick installation guide	✓
Authentication method	WPA2 AES	Packaging data	
Management features		Package width	300 mm
Management protocols	SNMP V2	Package depth	130 mm
Web-based management	✓	Package height	100 mm
DHCP client	✓	Package weight	1.48 kg
Features		Package type	Box
Product type *	Network bridge	Quantity per pack	1 pc(s)
Product colour	Black, White	Logistics data	
Remote control function	✓	UK Trade Tariff code	85176200
LED indicators	LAN, Signal strength	Country of origin	United Kingdom
Automatic Transmit Power Control (ATPC)	✓		
Wall mountable	✓		
Reset button	✓		

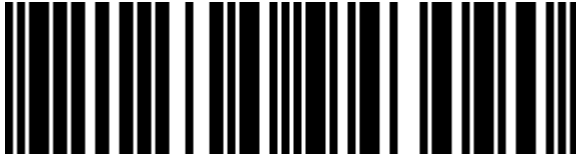

5712505943090



5060693980022

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.