



APC BGM2200B-GR UPS-virtalähde Linjainteraktiivinen 2,2 kVA 1320 W 6 AC-pistorasia(a)

Tuotemerkki : APC

Tuotekoodi: BGM2200B-GR


Tuotteen nimi : BGM2200B-GR

APC BGM2200B-GR. UPS topologia: Linjainteraktiivinen, Kokonaislähtöteho (VA): 2,2 kVA, Lähtöteho: 1320 W. Pistorasian tyypit: C13 liitin, Tyyppi F, Virtapistoke: Tyyppi F, Ulostulojen määrä: 6 AC-pistorasia(a). Akkuteknologia: Sealed Lead Acid (VRLA), Akun jännite: 24 V, Akun kestoikä (maks.): 5 vuosi/vuosia. Kotelo: Tower, Tuotteen väri: musta, Telineen kapasiteetti: 0U. Sertifiointi: IEC 62040-1-1 IEC 62040-2



Features		Battery	
UPS topology *	Line-Interactive	Battery recharge time	16 h
Output power capacity *	2.2 kVA	Automatic battery test	✓
Output power *	1320 W	Cold start	✓
Waveform *	Sine	Design	
Input operation voltage (min) *	168 V	Form factor *	Tower
Input operation voltage (max) *	302 V	Rack capacity	0U
Input frequency *	50/60 Hz	Cable length	1.52 m
Output operation voltage (max)	230 V	Product colour *	Black
Output frequency	60 Hz	Display type	LCD
Automatic Voltage Regulation (AVR)	✓	International Protection (IP) code	IP20
Maximum current	12 A	Operational conditions	
Surge energy rating	1080 J	Operating temperature (T-T)	0 - 40 °C
Response time	8 ms	Storage temperature (T-T)	-15 - 40 °C
EMI/RFI noise filtering	✓	Operating relative humidity (H-H)	0 - 95%
Noise level	45 dB	Storage relative humidity (H-H)	0 - 95%
Surge protection	✓	Operating altitude	0 - 3048 m
Surge protection features	Network	Non-operating altitude	0 - 3048 m
Audible alarm(s)	✓	Certificates	
Audible alarm modes	Alarm when on battery, Low battery alarm, Overload alarm	Certification	IEC 62040-1-1 IEC 62040-2
Ports & interfaces		Packaging content	
AC outlet types	C13 coupler, Type F	Cables included	USB cable
Power plug	Type F	Manual	✓
AC outlets quantity	6 AC outlet(s)	Sustainability	
USB port	✓	Sustainability certificates	Green Premium
Serial interface type	RJ-45	Weight & dimensions	
Cabling technology	10/100/1000Base-T(X)	Width	104.1 mm

Battery		Weight & dimensions	
Battery technology	Sealed Lead Acid (VRLA)	Depth	408.9 mm
Battery voltage	24 V	Height	292.1 mm
Number of batteries supported	1	Weight	12.3 kg
Battery life (max)	5 year(s)	Packaging data	
		Package width	355 mm
		Package depth	480 mm
		Package height	155 mm
		Package weight	14.5 kg

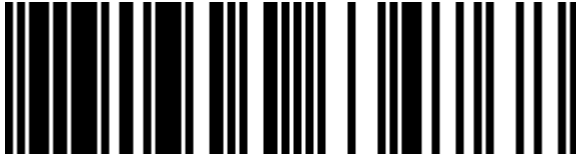

0731304634768



731304634768

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.