


MPN: MO-MMAIL10-CR

MicroOptics Mellanox MMA1L10-CR

Compatible 100GBASE-LR4 QSFP28

1310nm 10km DOM Duplex LC SMF

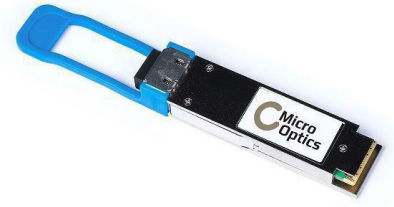

Specifications

Features	Certification	MSA
	Easy to install	Y
	Plug and Play	Y
	RoHS compliance	Y
Operational conditions	Operating temperature (T-T)	-45 - 75 °C
	Storage relative humidity (H-H)	10 - 85 %
	Storage temperature (T-T)	-40 - 85 °C
Package dimensions	Gross Weight (Package, kg)	0.02 kg
Packaging data	Number of products included	1 pc(s)
Performance	Digital Diagnostics Monitoring (DDM)	Y
	Duplex system	Full
	Fiber optic connector	LC
	Fiber ports quantity	1
	Interface type	QSFP28
	Maximum transfer distance	10000 m
	Multi-mode fiber (MMF) supported	N
	SFP transceiver standard	LR4
	SFP transceiver type	Fiber optic
	Single-mode fiber (SMF) supported	Y
	Wavelength	1310 nm
Product dimensions	Net Weight (Product, kg)	0.01 kg
Vendor information	Brand Name	MicroOptics

Vendor information

Warranty

3 Year(s)

Other images

