



## Canon i-SENSYS MF426dw Laser A4 1200 x 1200 DPI 38 ppm Wi-Fi

**Brand :** Canon

**Product family:** i-SENSYS

**Product code:** 2222C007

**Product name :** MF426dw

i-SENSYS MF426dw, 1200 x 1200 DPI, 38 ppm A4, 63.1 ppm A5, 30.3 ipm A4, 33.6 Kbps, ADF, USB 2.0, LAN, WLAN, 12.7cm LCD, 220-240 V 50 - 60 Hz, 453 x 464 x 392 mm

Canon i-SENSYS MF426dw Laser A4 1200 x 1200 DPI 38 ppm Wi-Fi:

Reliable, secure and easy-to-use all-in-one with fax printer for offices or SMEs with a multitude of functions.

The i-SENSYS MF420 series are multi-function printers offering SMEs speed, durability, and quality. Mobile connectivity maximises productivity.

### Genuine all-in-one cartridge

Makes printing easier and more reliable

### High capacity

250-sheet tray for A4, A5 & A6

### Simple to use

Five-inch LCD colour touchscreen

### Fast printing speeds

Up to 38ppm print speed

### Quick scanning

Double-sided single pass scanning

### Application library

Customised and automated functions

### High-quality

Up to 1200 x 1200 dpi resolution

### Security

Via PIN access to print



Printing		Input & output capacity	
Duplex printing mode	Auto	Multi-Purpose tray input capacity	100 sheets
Print technology *	Laser	Paper input type	Cassette, Paper tray
Printing *	Mono printing	Auto document feeder (ADF)	✓
Duplex printing *	✓	Auto document feeder (ADF) input capacity	50 sheets
Maximum resolution *	1200 x 1200 DPI	<b>Paper handling</b>	
Print speed (black, normal quality, A4/US Letter) *	38 ppm	Maximum ISO A-series paper size *	A4
Duplex print speed (black, normal quality, A4/US Letter)	30.3 ppm	Paper tray media types *	Envelopes, Heavy paper, Labels, Plain paper, Recycled paper, Thin paper
Warm-up time	14 s	Multi-purpose tray media types	Envelopes, Executive, Legal, Letter, Plain paper
Time to first page (black, normal)	5.5 s	ISO A-series sizes (A0...A9) *	A4, A5, A6
Print margins (top, bottom, right, left)	5 mm	ISO B-series sizes (B0...B9)	B5
Secure printing	✓	Non-ISO print media sizes	16K
<b>Copying</b>		Envelopes sizes	10, C5, DL, Monarch
Duplex copying *	✓	Custom media width	76.2 - 215.9 mm
Copying *	Mono copying	Custom media length	127 - 355.6 mm
Maximum copy resolution *	600 x 600 DPI	Paper tray media weight	52 - 120 g/m <sup>2</sup>
Copy speed (black, normal quality, A4)	38 cpm	Auto Document Feeder (ADF) media weight	50 - 105 g/m <sup>2</sup>
Duplex copy speed (black, US Letter)	30.3 ppm		


<b>Copying</b>		<b>Ports &amp; interfaces</b>	
Time to first copy (black, normal)	6.6 s	Standard interfaces	Ethernet, USB 2.0, Wireless LAN
Maximum number of copies	999 copies	Direct printing *	✓
Copier resize	25 - 400%	USB port	✓
N-in-1 copy function	✓	USB 2.0 ports quantity	1
N-in-1 copy function (N=)	2, 4	<b>Network</b>	
ID-card copy function	✓	Wi-Fi *	✓
Edge erase function	✓	Ethernet LAN *	✓
<b>Scanning</b>		Cabling technology	10/100/1000Base-T(X)
Duplex scanning *	✓	Ethernet LAN data rates	10,100,1000 Mbit/s
Scanning *	Colour scanning	Wi-Fi standards	802.11b, 802.11g, Wi-Fi 4 (802.11n)
Optical scanning resolution *	600 x 600 DPI	Security algorithms	64-bit WEP, 128-bit WEP, WPA-AES, WPA-PSK
Optical scanning resolution (black)	300 x 600 ppi	Supported network protocols (IPv4)	DHCP, ARP+PING, Auto IP, WINS, Bonjour(mDNS), HTTP, HTTPS, POP, LPD, RAW, Port9100, IPP, IPPS, WSD
Optical scanning resolution (colour)	300 x 600 ppi	Supported network protocols (IPv6)	DHCPv6, Bonjour(mDNS), HTTP, HTTPS, POP, LPD, RAW, Port9100, IPP, IPPS, WSD
Maximum scan resolution	9600 x 9600 DPI	Management protocols	SNMPv1, SNMPv3
Scanner type *	Flatbed & ADF scanner	Email protocols	Pop, SMTP
Scan to	Cloud, E-mail, FTP, PC, USB	IP address filtering	✓
Scan speed (colour)	13 ppm	Mobile printing technologies	Apple AirPrint, Canon PRINT Business, Google Cloud Print, Mopria Print Service
Scan speed (black)	38 ppm	<b>Performance</b>	
Duplex scan speed (colour)	26 ppm	Card reader integrated	✗
Duplex scan speed (black)	70 ppm	Internal memory *	1024 MB
Image formats supported	JPEG, TIFF	Built-in processor	✓
Document formats supported	PDF	Processor frequency	800 MHz
Input colour depth	24 bit	<b>Design</b>	
Output colour depth	24 bit	Product colour *	Black, White
Greyscale levels	256	Market positioning *	Business
Scan drivers	ICA, TWAIN, WIA	Built-in display *	✓
<b>Fax</b>		Display	LCD
Faxing *	Mono faxing	Display diagonal	12.7 cm (5")
Fax resolution (black)	400 x 400 DPI	Touchscreen	✓
Fax transmission speed	3 sec/page	Control type	Touch
Modem speed	33.6 Kbit/s	Colour display	✓
Fax memory	512 pages	<b>Power</b>	
Auto-redialing	✓	Power consumption (standby)	10 W
Fax speed dialing (max numbers)	281	Power consumption (sleep)	0.9 W
Fax forwarding	✓	Energy Star Typical Electricity Consumption (TEC)	1.2 kWh/week
Error Correction Mode (ECM)	✓	AC input voltage	220 - 240 V
Fax dual access	✓	AC input frequency	50 - 60 Hz
Multiple-destination sending	✓	<b>System requirements</b>	
<b>Features</b>		Windows operating systems supported	Windows 10, Windows 7, Windows 8, Windows 8.1
Recommended duty cycle	750 - 4000 pages per month	Mac operating systems supported	Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks
Maximum duty cycle *	80000 pages per month	Linux operating systems supported	✓
Number of print cartridges *	1	Server operating systems supported	Windows Server 2008, Windows Server 2012, Windows Server 2016
Printing colours *	Black	<b>Operational conditions</b>	
Page description languages	PCL 5e, PCL 6, PostScript, UFRII	Operating relative humidity (H-H)	20 - 80%
Printer fonts	PCL, PostScript	Operating temperature (T-T)	10 - 30 °C
Number of printer fonts	181		
Number of PCL fonts	45		
Number of PostScript fonts	136		
<b>Input &amp; output capacity</b>			
Total number of input trays *	1		
Total input capacity *	250 sheets		
Total output capacity *	150 sheets		
Multi-Purpose tray	✓		

**Weight & dimensions**

Width	453 mm
Depth	464 mm
Height	392 mm
Weight	16.9 kg

**Other features**

Fonts included	✓
----------------	---

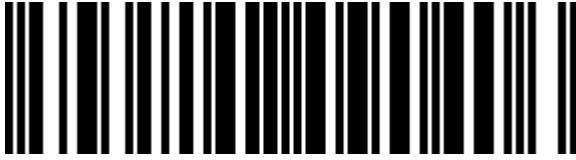

4549292090406

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 28-DEC-2024. Prints or copies of Information are only valid on the printed Publication date