


LC/UPC Pigtail Multimode 2m OM4 50/125 PVC EASY STRIP

Item no.: LVO231808

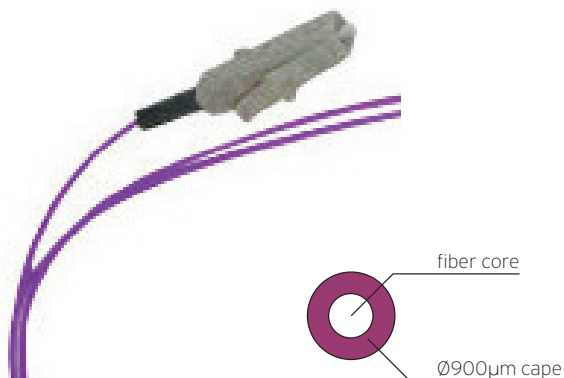

PRODUCT OVERVIEW

Designed for Data Centers, Industry and Computer Centers.
Used for splicing fibre optical cables.

Comes with ceramic zirconia ferrule. Used in telecommunication and data communication installations in high speed network.

SPECIFICATIONS

Industry standard compliance	ISO 9001, RoHS, UL, GR-326-Core, Telcordia and IEC compatible standards
Fiber	OM4
Tests	IHT, IEC 61755, IEC61300
Connector	LC
Polishing	UPC
Max loss	0.30 db
Min return loss	35 db
Storage temperature	-40°C - + 85°C
operating temperature	-40°C - +75°C
Jacket	Ø900 µ
Length	2 meter

