



## APC SMX1000I

**Tuotemerkki :** APC

**Tuotekoodi:** SMX1000I

**Tuotteen nimi :** SMX1000I




Smart-UPS X 1000VA LCD line-interactive UPS, räkki/tornimalli  
APC SMX1000I. UPS topologia: Linjainteraktiivinen, Kokonaislähtöteho (VA): 1 kVA, Lähtöteho: 800 W.  
Pistorasian tyypit: C13 liitin, Virtapistoke: C14 liitin, Ulostulojen määrä: 8 AC-pistorasia(a).  
Akkuteknologia: Sealed Lead Acid (VRLA), Akun kapasiteetti: 299 VAh, Tyypillinen varmuuskopioaika täydellä kuormituksella: 8,1 min. Kotelo: Telineasennettava/Torni, Tuotteen väri: musta, Telineen kapasiteetti: 2U. Vaatimustenmukaisuustodistukset: RoHS, Sertifiointi: CE, EN/IEC 62040-1, EN/IEC 62040-2, RCM, VDE, REACH, PEP, EOLi



Features		Design	
UPS topology *	Line-Interactive	Cable length	1.83 m
Output power capacity *	1 kVA	Product colour *	Black
Output power *	800 W	LED indicators	✓
Waveform *	Sine	<b>Operational conditions</b>	
Input operation voltage (min) *	151 V	Operating temperature (T-T)	0 - 40 °C
Input operation voltage (max) *	302 V	Storage temperature (T-T)	-15 - 45 °C
Input frequency *	50/60 Hz	Operating relative humidity (H-H)	0 - 95%
Output frequency regulation	50/60 Hz	Storage relative humidity (H-H)	0 - 95%
Automatic Voltage Regulation (AVR)	✓	Operating altitude	0 - 3000 m
Surge energy rating	600 J	Non-operating altitude	0 - 15000 m
Efficiency	98.2%	<b>Certificates</b>	
Emergency Power Off (EPO)	✓	Compliance certificates	RoHS
Noise level	40 dB	Certification	CE, EN/IEC 62040-1, EN/IEC 62040-2, RCM, VDE, REACH, PEP, EOLi
Surge protection	✓	<b>Packaging content</b>	
Audible alarm(s)	✓	Rack mount kit	✓
Audible alarm modes	Low battery alarm, Overload alarm	Cables included	RS-232, USB cable
Auto-restart	✓	Quick installation guide	✓
<b>Ports &amp; interfaces</b>		<b>Sustainability</b>	
AC outlet types	C13 coupler	Sustainability certificates	Green Premium
Power plug	C14 coupler	<b>Weight &amp; dimensions</b>	
AC outlets quantity	8 AC outlet(s)	Width	432 mm
Number of output IEC jumpers	2	Depth	490 mm
USB port	✓	Height	89 mm
SmartSlot	✓	Weight	22.9 kg
<b>Battery</b>			
Battery technology	Sealed Lead Acid (VRLA)		
Battery capacity	299 VAh		

Battery		Packaging data	
Typical backup time at full load	8.1 min	Software CD	✓
Typical backup time at half load	24.2 min	Package width	589 mm
Battery life (max)	5 year(s)	Package depth	620 mm
Battery recharge time	3 h	Package height	246 mm
Hot-swap battery	✗	Package weight	27.3 kg
Automatic battery test	✓	Logistics data	
Cold start	✓	Products per pallet	8 pc(s)
Design		Harmonized System (HS) code	85078000
Form factor *	Rackmount/Tower	Total carbon footprint (kg of CO2e)	1153.31
Rack capacity	2U	Other features	
		Nominal output voltage	230 V
		Nominal input voltage	230 V
		Packaging content	Removable support feet

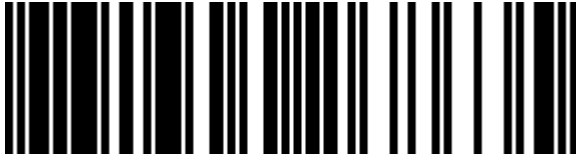

0731304268635



731304268635

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.