

## ASUS TUF GAMING B650M-PLUS WIFI AMD B650 Pistoke AM5 mikro ATX

**Tuotemerkki :** ASUS

**Tuotekoodi:** 90MB1BF0-M0EAY0


**Tuotteen nimi :** TUF GAMING B650M-PLUS WIFI

ASUS TUF GAMING B650M-PLUS WIFI. Suoritinvalmistaja: AMD, Prosessorin kanta: Pistoke AM5. Tuetut muistityypit: DDR5-SDRAM, Sisäinen enimmäismuisti: 128 GB, Muistipaikkojen tyyppi: DIMM. Tuetut tallennusasemaliitännät: M.2, SATA III, Tuetut tallennusasematyypit: HDD & SSD, RAID-tasot: 0, 1, 10. Ethernet-liitännän tyyppi: 2.5 Gigabit Ethernet, Nopea Ethernet, Gigabitti Ethernet, Wi-Fi-standardi: Wi-Fi 6 (802.11ax), Wi-Fi-standardit: 802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac), Wi-Fi 6 (802.11ax). Komponentti (tuotteelle): PC, Emolevyn muototekijä: mikro ATX, Emolevyn piirisarjan perhe: AMD



Processor		Rear panel I/O ports	
Processor manufacturer *	AMD	USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity *	1
Processor socket *	Socket AM5	USB 3.2 Gen 2 (3.1 Gen 2) Type-A ports quantity *	2
Memory		USB 3.2 Gen 2x2 Type-C ports quantity	1
Supported memory types *	DDR5-SDRAM	Ethernet LAN (RJ-45) ports *	1
Number of memory slots *	4	HDMI ports quantity *	1
Memory slots type	DIMM	DisplayPorts quantity	1
Memory channels	Dual-channel	Line-in	✓
ECC compatibility	ECC & Non-ECC	Microphone in	✓
Supported memory clock speeds	4800,5000,5200,5400,5600,5800,6000,6200,6400 MHz	Network	
Maximum internal memory *	128 GB	Ethernet LAN	✓
Unbuffered memory	✓	Ethernet interface type	2.5 Gigabit Ethernet, Fast Ethernet, Gigabit Ethernet
Storage controllers		Wi-Fi *	✓
Supported storage drive types	HDD & SSD	Top Wi-Fi standard	Wi-Fi 6 (802.11ax)
Supported storage drive interfaces *	M.2, SATA III	Wi-Fi standards	802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac), Wi-Fi 6 (802.11ax)
Number of storage drives supported	6	Bluetooth	✓
RAID support	✓	Bluetooth version	5.2
RAID levels	0, 1, 10	Features	
Graphics		Motherboard chipset *	AMD B650
On-board graphics card	✗	Audio output channels *	7.1 channels
Internal I/O		Product colour	Black
USB 2.0 connectors *	2	Component for *	PC
USB 3.2 Gen 1 (3.1 Gen 1) connectors *	2	Motherboard form factor *	micro ATX
Number of SATA III connectors *	4	Motherboard chipset family *	AMD
Front panel audio connector	✓		
ATX Power connector (24-pin)	✓		
CPU fan connector	✓		

Internal I/O		Features	
Number of chassis fan connectors	3	Windows operating systems supported	Windows 10 x64, Windows 11 x64
EPS power connector (8-pin)	✓	<b>Expansion slots</b>	
Number of COM connectors	1	PCI Express x1 (Gen 4.x) slots	1
Thunderbolt headers	1	PCI Express x16 (Gen 4.x) slots	2
RGB LED pin header	✓	Number of M.2 (M) slots	2
Rear panel I/O ports		BIOS	
USB 2.0 ports quantity *	4	BIOS type *	UEFI AMI
		BIOS memory size	256 Mbit
		Weight & dimensions	
		Width	244 mm
		Depth	244 mm

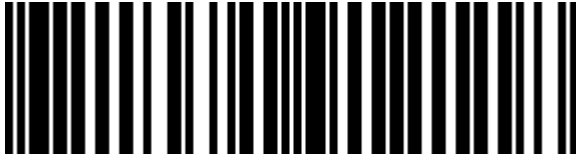

4711081912118



0195553912112



195553912112

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.