



APC Symmetra RM 6kVA Scalable to 6kVA N+1 220-240V



Brand : APC

Product code: SYH6K6RMI

Product name : Symmetra RM 6kVA Scalable to 6kVA N+1 220-240V

Symmetra RM 6kVA Scalable to 6kVA N+1 220-240V

APC Symmetra RM 6kVA Scalable to 6kVA N+1 220-240V:


This parts kit contains spare parts for the APC product model shown.

APC Symmetra RM 6kVA Scalable to 6kVA N+1 220-240V. Output power capacity: 6 kVA, Output power: 4200 W. Typical backup time at full load: 12.7 min, Typical backup time at half load: 30.3 min, Replacement battery cartridge: APC Replacement Battery SYBT2. Product colour: Black. Bundled software: - PowerChute Network Shutdown - PowerChute plus for AIX v4.2.3 - PowerChute plus for HP-UX v 4.2.3.... Battery type: Maintenance-free sealed Lead-Acid battery with suspended electrolyte: leakproof, Interface: DB-9 RS-232, RJ-45 10 Base-T ethernet for web/ SNMP/ Telnet management, Output connections: (8)IEC 320 C13 (2)IEC 320 C19

| Features | | Operational conditions | |
|-----------------------------------|-------------------------------|---------------------------------|---|
| Output power capacity * | 6 kVA | Storage relative humidity (H-H) | 0 - 95% |
| Output power * | 4200 W | Packaging data | |
| Emergency Power Off (EPO) | ✓ | Bundled software | - PowerChute Network Shutdown - PowerChute plus for AIX v4.2.3 - PowerChute plus for HP-UX v 4.2.3 - PowerChute plus for Linux v 4.5.2 - PowerChute plus for Novell NetWare v4.3.3 - PowerChute plus for Red Hat Linux v 4.5.2.1 - PowerChute plus for Solaris v 4.5 - PowerChute Plus for Windows NT/2000 (English) v. 5.2.1 |
| Battery | | Logistics data | |
| Typical backup time at full load | 12.7 min | Harmonized System (HS) code | 85078000 |
| Typical backup time at half load | 30.3 min | Other features | |
| Replacement battery cartridge | APC Replacement Battery SYBT2 | Battery type | Maintenance-free sealed Lead-Acid battery with suspended electrolyte: leakproof |
| Design | | Interface | DB-9 RS-232, RJ-45 10 Base-T ethernet for web/ SNMP/ Telnet management |
| Product colour * | Black | Output connections | (8)IEC 320 C13 (2)IEC 320 C19 |
| Operational conditions | | Input connection type | Hard Wire 3-wire |
| Operating temperature (T-T) | 0 - 40 °C | Dimensions (WxDxH) | 482.6 x 730.3 x 355.6 mm |
| Storage temperature (T-T) | -15 - 45 °C | Nominal output voltage | 230 V |
| Operating relative humidity (H-H) | 0 - 95% | Output voltage note | Configurable for 220: 230 or 240 nominal output voltage |
| | | Nominal input voltage | 230 V |



5907176118919

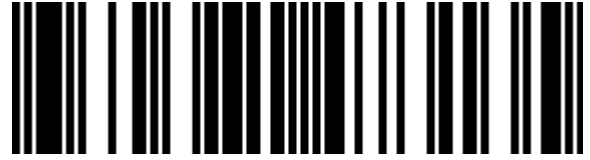

7330381473135



8592978085360



5054444438214

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.