



## APC Symmetra RM 4kVA Scalable to 6kVA N+1 220-240V

**Brand :** APC

**Product code:** SYH4K6RMI

**Product name :** Symmetra RM 4kVA Scalable to 6kVA N+1 220-240V




Symmetra RM 4kVA Scalable to 6kVA N+1 220-240V

APC Symmetra RM 4kVA Scalable to 6kVA N+1 220-240V:

This parts kit contains spare parts for the APC product model shown.

APC Symmetra RM 4kVA Scalable to 6kVA N+1 220-240V. Output power capacity: 4 kVA, Output power: 2800 W. Typical backup time at full load: 12.7 min, Typical backup time at half load: 30.2 min, Replacement battery cartridge: APC Replacement Battery SYBT2. Product colour: Black. Bundled software: - PowerChute Network Shutdown - PowerChute plus for AIX v4.2.3 - PowerChute plus for HP-UX v 4.2.3.... Battery type: Maintenance-free sealed Lead-Acid battery with suspended electrolyte: leakproof, Interface: DB-9 RS-232, RJ-45 10 Base-T ethernet for web/ SNMP/ Telnet management, Output connections: (8)IEC 320 C13 (2)IEC 320 C19


Features		Operational conditions	
Output power capacity *	4 kVA	Storage relative humidity (H-H)	0 - 95%
Output power *	2800 W	Packaging data	
Emergency Power Off (EPO)	✓		
Battery			
Typical backup time at full load	12.7 min	Bundled software	- PowerChute Network Shutdown - PowerChute plus for AIX v4.2.3 - PowerChute plus for HP-UX v 4.2.3 - PowerChute plus for Linux v 4.5.2 - PowerChute plus for Novell NetWare v4.3.3 - PowerChute plus for Red Hat Linux v 4.5.2.1 - PowerChute plus for Solaris v 4.5 - PowerChute Plus for Windows NT/2000 (English) v. 5.2.1
Typical backup time at half load	30.2 min		
Replacement battery cartridge	APC Replacement Battery SYBT2		
Design			
Product colour *	Black		
Operational conditions		Logistics data	
Operating temperature (T-T)	0 - 40 °C	Harmonized System (HS) code	85078000
Storage temperature (T-T)	-15 - 45 °C	Other features	
Operating relative humidity (H-H)	0 - 95%		
		Battery type	Maintenance-free sealed Lead-Acid battery with suspended electrolyte: leakproof
		Interface	DB-9 RS-232, RJ-45 10 Base-T ethernet for web/ SNMP/ Telnet management
		Output connections	(8)IEC 320 C13 (2)IEC 320 C19
		Input connection type	Hard Wire 3-wire
		Dimensions (WxDxH)	482.6 x 730.3 x 355.6 mm
		Nominal output voltage	230 V
		Output voltage note	Configurable for 220: 230 or 240 nominal output voltage
		Nominal input voltage	230 V

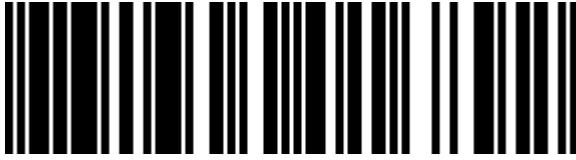

0731304016892



731304016892

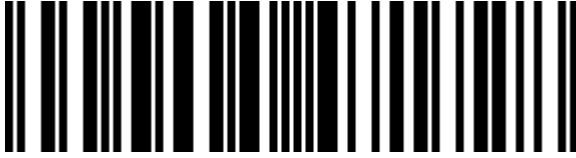

2000005471728

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.