



APC BX950MI UPS-virtalähde Linjainteraktiivinen 0,95 kVA 520 W 6 AC-pistorasia(a)

Tuotemerkki : APC

Tuotekoodi: BX950MI


Tuotteen nimi : BX950MI

APC BX950MI. UPS topologia: Linjainteraktiivinen, Kokonaislähtöteho (VA): 0,95 kVA, Lähtöteho: 520 W. Pistorasian tyypit: C13 liitin, Virtapistoke: C14 liitin, Ulostulojen määrä: 6 AC-pistorasia(a). Akkuteknologia: Sealed Lead Acid (VRLA), Tyypillinen varmuuskopioaika täydellä kuormituksella: 1 min, Tyypillinen varmuuskopioaika puolikkaalla kuormituksella: 6,5 min. Kotelo: Kompakti, Tuotteen väri: musta, Johdon pituus: 1,2 m. Vaatimustenmukaisuustodistukset: RoHS, Sertifiointi: CB Meet EN62040-1 / CE / IEC-62040-1 / IEC-62040-2



Features		Battery	
UPS topology *	Line-Interactive	Typical backup time at full load	1 min
Output power capacity *	0.95 kVA	Typical backup time at half load	6.5 min
Output power *	520 W	Battery life (max)	2 year(s)
Waveform *	Sine	Battery recharge time	8 h
Input operation voltage (min) *	140 V	Design	
Input operation voltage (max) *	300 V	Form factor *	Compact
Input frequency *	50/60 Hz	Cable length	1.2 m
Output operation voltage (min)	230 V	Product colour *	Black
Output operation voltage (max)	230 V	LED indicators	✓
Output frequency	50/60 Hz	International Protection (IP) code	IP20
Output frequency regulation	0.5 Hz	Operational conditions	
Output voltage regulation	10%	Operating temperature (T-T)	0 - 40 °C
Automatic Voltage Regulation (AVR) ✓		Storage temperature (T-T)	-15 - 40 °C
Surge energy rating	273 J	Operating relative humidity (H-H)	0 - 95%
Response time	6 ms	Operating altitude	0 - 3000 m
Input power factor	0.54	Certificates	
Noise level	40 dB	Compliance certificates	RoHS
Surge protection ✓		Certification	CB Meet EN62040-1 / CE / IEC-62040-1 / IEC-62040-2
Audible alarm(s) ✓		Packaging content	
Audible alarm modes	Low battery alarm	Cables included	Input power cable
Ports & interfaces		Manual	✓
AC outlet types	C13 coupler	Weight & dimensions	
Power plug	C14 coupler	Width	120 mm
AC outlets quantity	6 AC outlet(s)	Depth	355 mm
USB port	✓	Height	160 mm
USB 2.0 ports quantity	1		
USB port type	USB Type-B		
Ethernet LAN (RJ-45) ports	2		

Battery		Weight & dimensions	
Battery technology	Sealed Lead Acid (VRLA)	Weight	6.1 kg
		Packaging data	
		Package width	197 mm
		Package depth	430 mm
		Package height	250 mm
		Package weight	6.6 kg
		Logistics data	
		Harmonized System (HS) code	85078000

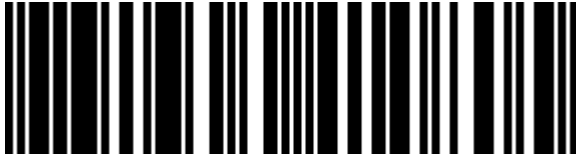

0731304410805



731304410805

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.