Epson TM-M30II 203 x 203 DPI Wired Direct thermal POS printer

Brand : Epson

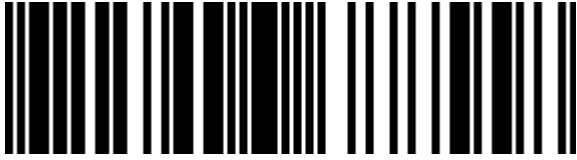**Product name :** TM-M30II

Product code: C31CJ27122A0

- Iconic design: Stylish, practical design with small footprint and clean lines
- Cost effective: Entry-level model (refreshed version of its predecessor, the TM-m30)
- Fast printing: Increased print speed of 250mm/s
- Direct printing from mobile devices: Without the need to install or update drivers
- Reliable: Epson's tried and trusted build quality

Compact mPOS receipt printer TM-M30II (122A0): USB + ETHERNET + NES, BLACK, PS, UK
Epson TM-M30II. Print technology: Direct thermal, Type: POS printer, Maximum resolution: 203 x 203 DPI. Maximum roll diameter: 8.3 cm, Supported paper width: 58 mm - 80 mm (Breite), Maximum printing width: 8 cm. Connectivity technology: Wired, USB connector: USB Type-A / USB Type-B. Sound pressure level (printing): 55 dB, Mean time between failures (MTBF): 360000 h, Autocutter durability: 1.5 million cuts. Product colour: White

Printing

Maximum resolution	203 x 203 DPI
Print speed	250 mm/sec
Print speed (receipt)	250 mm/sec
Printing characters	Text, Graphic, Barcode
Character sets	ANK
Print technology *	Direct thermal
Type *	POS printer

Paper handling

Maximum roll diameter	8.3 cm
Supported paper width	58 mm - 80 mm (Breite)
Maximum printing width	8 cm

Ports & interfaces

USB port *	✔
USB 2.0 ports quantity	2
USB connector	USB Type-A / USB Type-B
Connectivity technology *	Wired
Near Field Communication (NFC)	✔

Network

Ethernet LAN *	✔
Wi-Fi *	✘

Features

Sound pressure level (printing)	55 dB
Mean time between failures (MTBF)	360000 h
Half-cutter	✔
Autocutter durability	1.5 million cuts
Print head life	150 km
Country of origin	Philippines
Mounting position	Horizontal/Vertical
Wall mountable	✔
Built-in sensors details	Paper End Sensor, Papier-Sensor

Design

Product colour *	White

Power

Power source type *	AC
Power plug type	Type G

Operational conditions

Operating relative humidity (H-H)	10 - 90%
Storage relative humidity (H-H)	10 - 90%

System requirements

Pre-installed software	TMNet WebConfig, ePOS-Device, ePOS-Display, ePOS-Print

Weight & dimensions

Width	127 mm
Depth	127 mm
Height	127 mm
Weight	1.3 kg

Packaging data

Quantity per pack	1 pc(s)
Package width	200 mm
Package depth	240 mm
Package height	240 mm
Package weight	2.15 kg

Packaging content

AC adapter included	✔

Print technology

Column capacity	48/57

Logistics data

Pallet weight (UK)	0 g
Harmonized System (HS) code	84433210
Products per master (outer) case	4 pc(s)
Master (outer) case width	400 mm
Master (outer) case length	490 mm
Master (outer) case height	255 mm
Master (outer) case gross weight	0 g
Products per pallet	128 pc(s)
Pallet gross weight	0 g
Products per pallet (UK)	192 pc(s)

Technical details

Font styles	ANK
Lifetime	17000000 lines

Operational conditions		Other features	
Operating temperature (T-T)	5 - 45 °C	Buffer size	12 KB
Storage temperature (T-T)	-20 - 60 °C	Mean cycles between failures (MCBF)	65000000
		Print head life	150.000.000 Impulse

8715946688558