



APC SRTL1500RM4UXLI UPS-virtalähde Taajuuden kaksoismuunnos (verkossa) 1,5 kVA 1350 W 8 AC-pistorasia(a)

Tuotemerkki : APC

Tuotekoodi: SRTL1500RM4UXLI

Tuotteen nimi : SRTL1500RM4UXLI

APC SRTL1500RM4UXLI. UPS topologia: Taajuuden kaksoismuunnos (verkossa), Kokonaislähtöteho (VA): 1,5 kVA, Lähtöteho: 1350 W. Pistorasian tyypit: C13 liitin, Virtapistoke: C14 liitin, Ulostulojen määrä: 8 AC-pistorasia(a). Akkuteknologia: Litiumioni (Li-Ion), Akun jännite: 48 V, Tyypillinen varmuuskopioaika täydellä kuormituksella: 93 min. Kotelotyyppi: Telineasennettava/Torni, Tuotteen väri: musta, Hopea, Telineen kapasiteetti: 4U. Vaatimustenmukaisuustodistukset: CE, RoHS, Sertifiointi: RoHS, CE



Features		Battery	
UPS topology *	Double-conversion (Online)	Battery technology	Lithium-Ion (Li-Ion)
Output power capacity *	1.5 kVA	Battery voltage	48 V
Output power *	1350 W	Typical backup time at full load	93 min
Waveform *	Sine	Typical backup time at half load	176 min
Input operation voltage (min) *	220 V	Battery life (max)	10 year(s)
Input operation voltage (max) *	230 V		
Input frequency *	40 - 70 Hz	Design	
Output operation voltage (min)	220 V	Form factor *	Rackmount/Tower
Output operation voltage (max)	230 V	Rack capacity	4U
Output frequency	50/60 Hz	Cable length	1.83 m
Output frequency regulation	-3 - 3 Hz	Product colour *	Black, Silver
Surge energy rating	340 J	Control type	Buttons
Heat dissipation	450 BTU/h	LED indicators	✓
Number of input phases	1	International Protection (IP) code	IP20
Crest factor	3:1		
Emergency Power Off (EPO)	✓	Operational conditions	
Output voltage Total Harmonic Distortion (THD)	2%	Operating temperature (T-T)	0 - 40 °C
Noise level	50 dB	Storage temperature (T-T)	-15 - 45 °C
Surge protection	✓	Operating relative humidity (H-H)	0 - 95%
Audible alarm(s)	✓	Storage relative humidity (H-H)	0 - 95%
Power source type	AC	Operating altitude	0 - 3048 m
Detachable power cord	✓	Non-operating altitude	0 - 15240 m
		Certificates	
Ports & interfaces		Compliance certificates	CE, RoHS
AC outlet types	C13 coupler	Certification	RoHS, CE
Power plug	C14 coupler		
AC outlets quantity	8 AC outlet(s)	Packaging content	
USB port	✓	Cables included	Power load cable
		Sustainability	

Ports & interfaces


USB 2.0 ports quantity	1
USB port type	USB Type-A
Emergency Power Off (EPO) connector	✓

Sustainability

Sustainability certificates	Green Premium
-----------------------------	---------------

Weight & dimensions

Width	432 mm
Depth	590 mm
Height	171 mm
Weight	40.7 kg

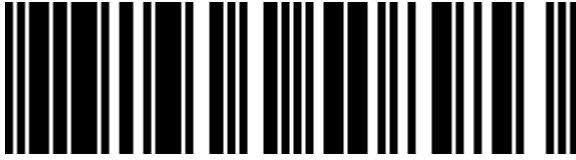

0731304508953



731304508953



8592978423735

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.